


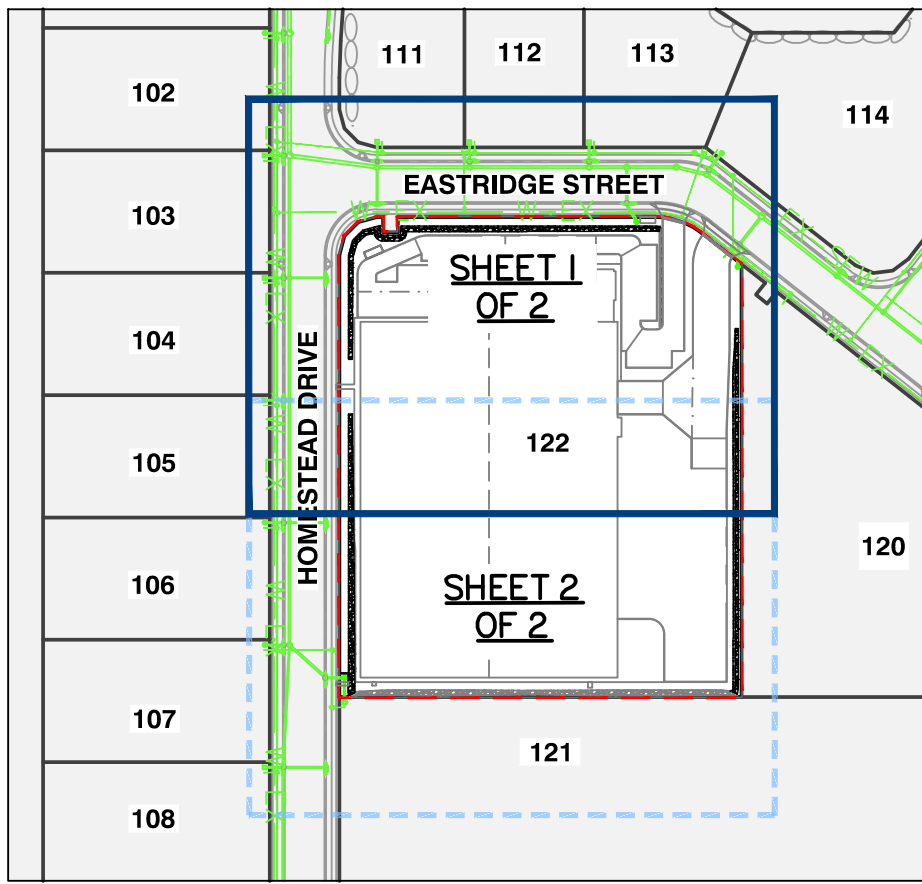


EARTHWORKS VOLUME SUMMARY (UNDER BUILDING SLAB)	
CUT	- m ³
FILL	1,259 m ³
TOTAL BALANCE	1,259 m ³
NOTE: FILL UNDER SLAB TO BE MIN 35mm THICK TYPE 2.5 (CBR15) CRUSHED ROCK SIZE 14. REFER TO STRUCTURAL PLANS FOR DETAILS	
1. EARTHWORKS LEVELS SHOWN ARE TO UNDER SIDE OF SLAB/PAVEMENT AND BINDING LAYER.	
2. EARTHWORKS CUT/FILL IS OFFSET 500mm BEHIND FACE OF RECESSED DOCK WALL TO CATER FOR WALL AND BACKFILL REQUIREMENTS	

EARTHWORKS VOLUME SUMMARY	
CUT	-3,444.4 m ³
FILL	1,036.0 m ³
TOTAL BALANCE	-2,408.4 m ³
NOTE: EXCESS CUT MATERIAL TO BE REMOVE OFF SITE.	

RETAINING WALLS SUBJECT TO BUILDING PERMIT AS PER OPW CONDITIONS

BULK EARTHWORKS DEPTH RANGE LEGEND											
-10.0 to -4.0 m		-2.0 to -1.5 m		0 to 0.5 m		2.5 to 3.0 m					
-4.0 to -3.5 m		-1.5 to -1.0 m		0.5 to 1.0 m		3.0 to 3.5 m					
-3.5 to -3.0 m		-1.0 to -0.5 m		1.0 to 1.5 m		3.5 to 4.0 m					
-3.0 to -2.5 m		-0.5 to 0 m		1.5 to 2.0 m		4.0 to 10.0 m					
-2.5 to -2.0 m				2.0 to 2.5 m							

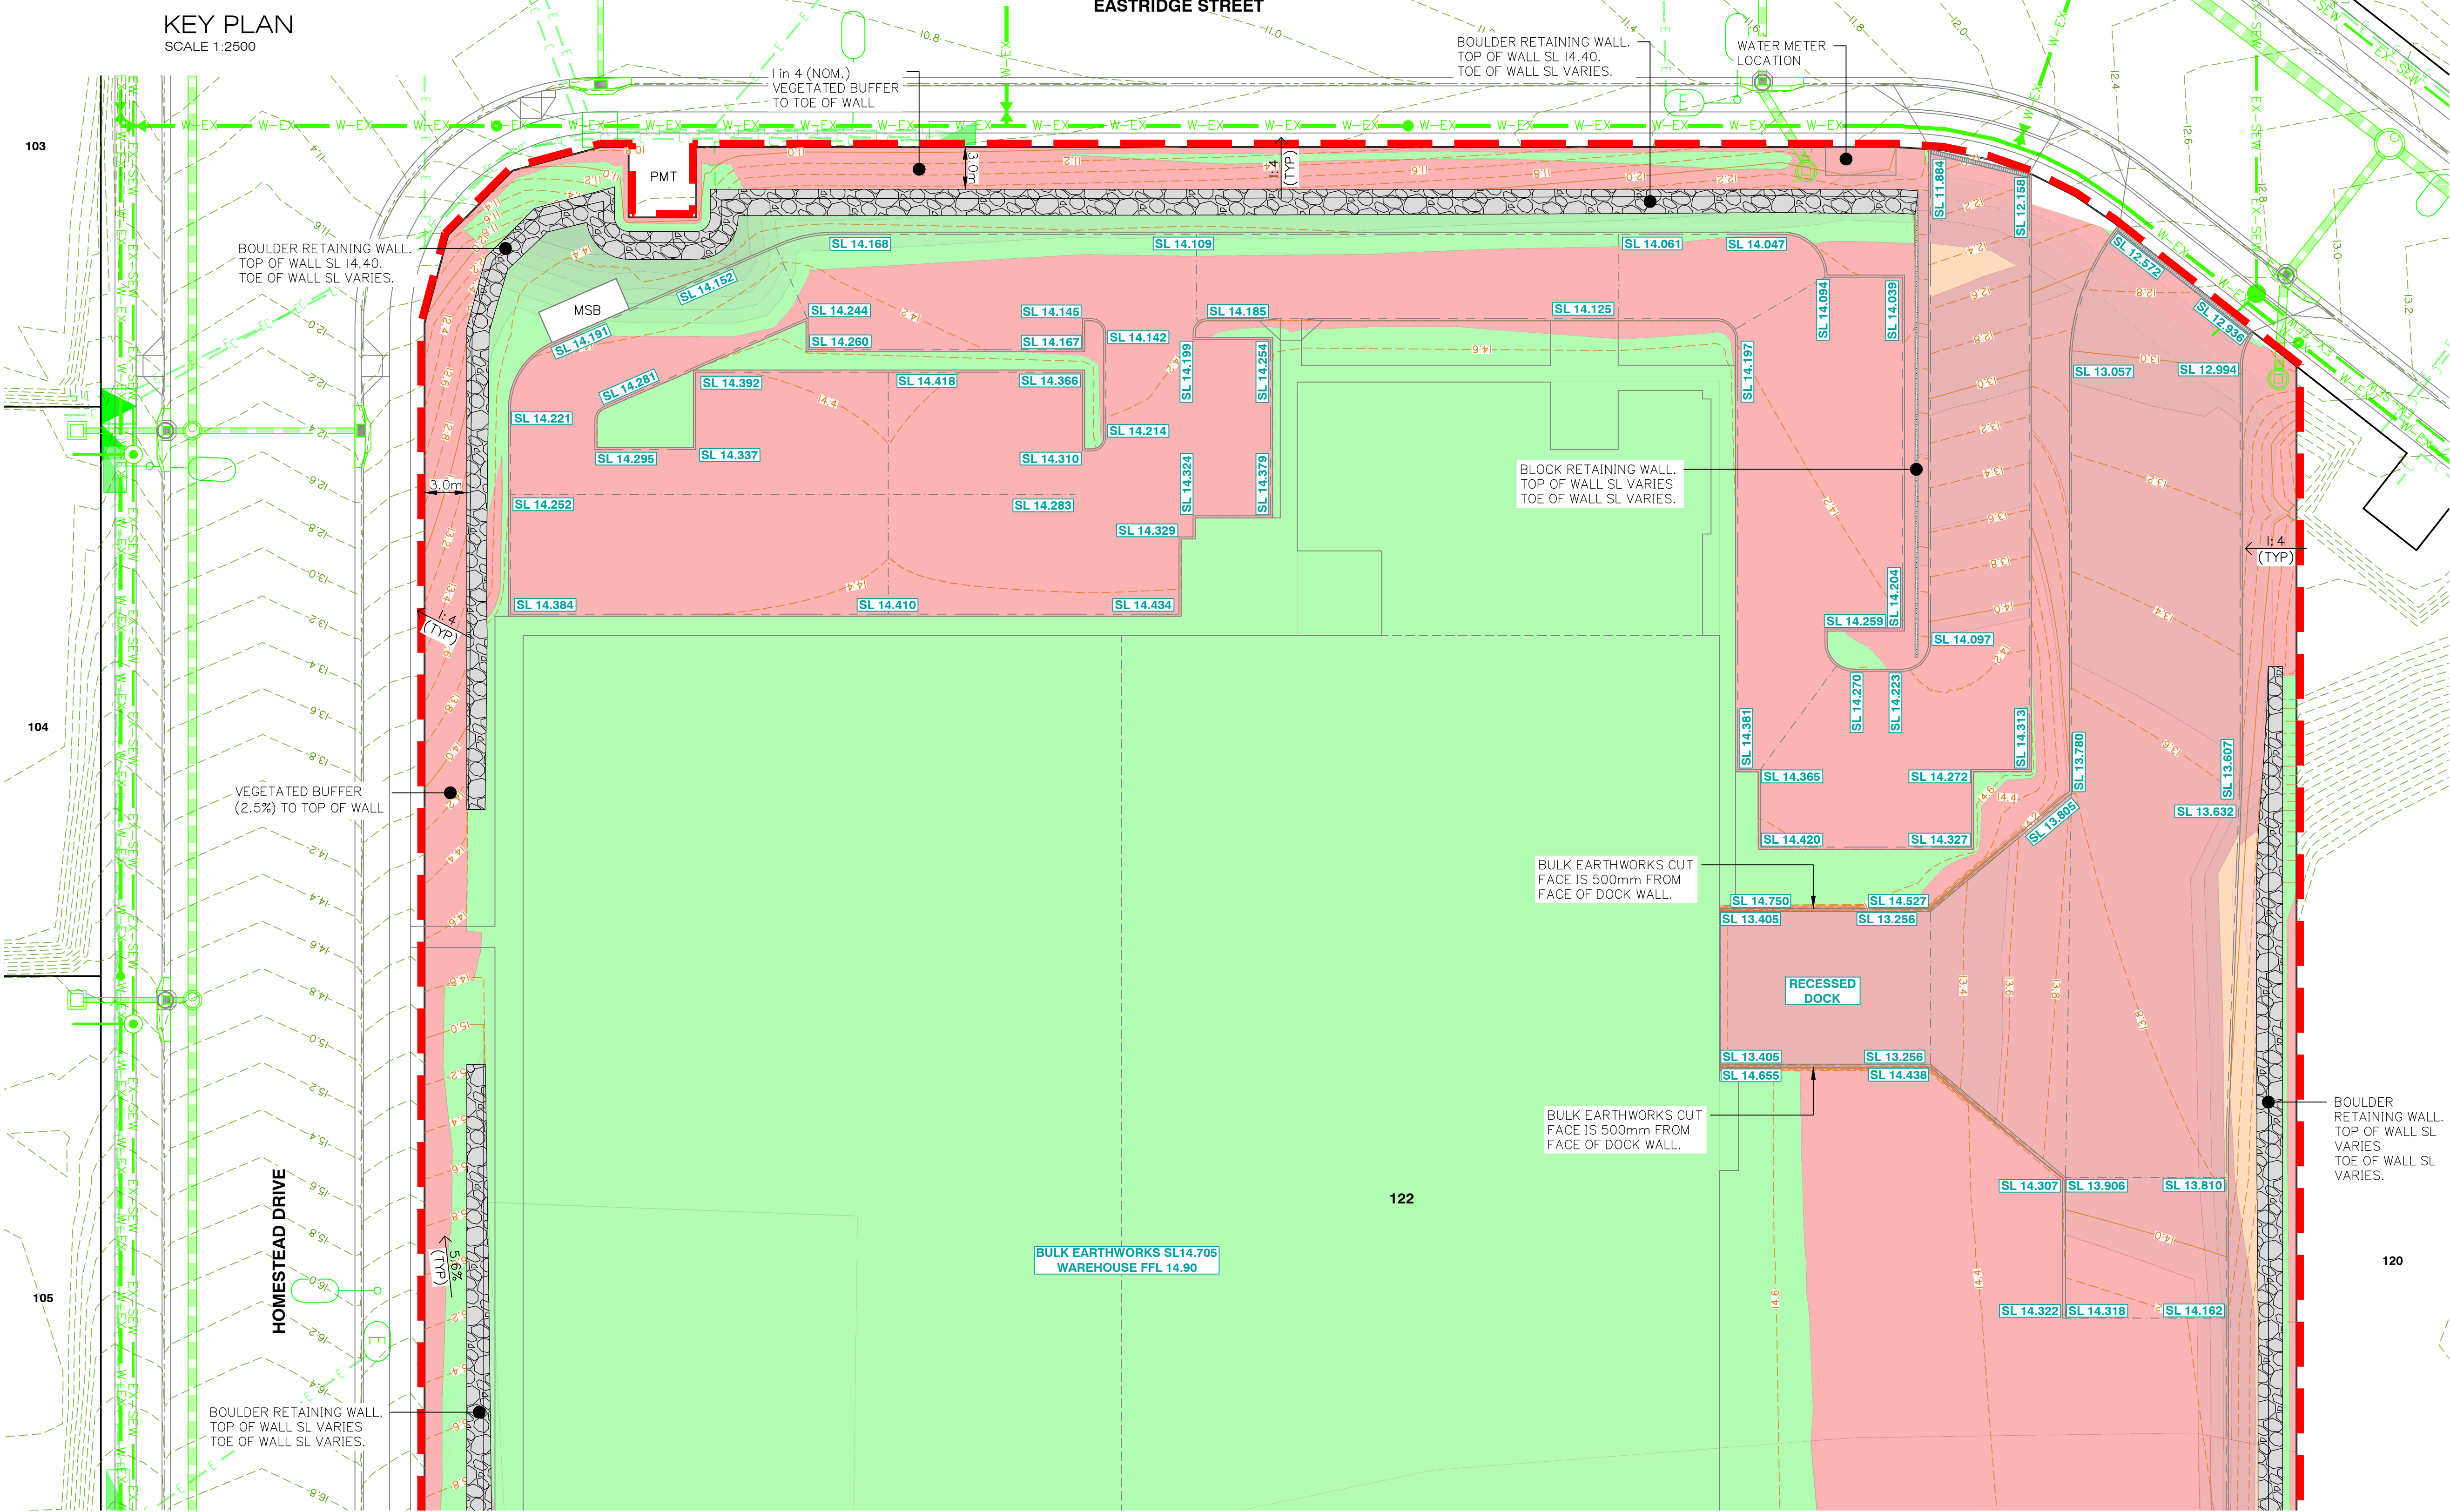

BULK EARTHWORKS CUT & FILL LAYOUT PLAN SHEET 1 OF 2

E	22/07/24	NOTE UPDATED	JH	MG
D	15/07/24	EARTHWORKS UPDATED	JH	MG
C	18/04/24	DESIGN UPDATED	ML	MG
B	21/09/23	CARPARK LAYOUT AMENDED	JH	MG
A	20/07/23	ORIGINAL ISSUE	TGP	MG
Rev	Date	Description	DRN	CHK
DIMENSIONS IN METRES EXCEPT WHERE SHOWN OTHERWISE. CULVERT AND PIPE SIZES IN MILLIMETRES			A1 UNREDUCED	A3 REDUCED

Scale:
0 5 10 15 20m
1:250 (A1) 1:500 (A3)

Designed: JH	Drafted: ML
Approved: MG	
RPEQ: 16939	
Signed:	
Date: 18/04/2024	
Drawing No: 6182 ENG BE 050	Revision: E

Client:



FPI QUEENSLAND PTY LTD

Project:

WAREHOUSE
DEVELOPMENT

Site Address:

10 HOMESTEAD DRIVE
STAPYLTON, QLD

RPD:

Lot: 122
Plan: SP329476
Local Authority: CoGC

Level Datum: AHD
Meridian: -
PSM: -
RL: -

FOR APPROVAL

©2012 Gassman Development Perspectives
All rights reserved. No part of this document may be reproduced or transmitted in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the written permission of Gassman Development Perspectives.
THIS DRAWING IS INTENDED TO BE PRINTED IN COLOUR. ALL DRAWINGS ARE TO BE READ IN CONJUNCTION WITH GENERAL NOTES.

Drawing Title:

BULK EARTHWORKS
CUT & FILL LAYOUT PLAN
SHEET 2 OF 2

Rev	Date	Description	DRN	CHK
E	22/07/24	NOTE UPDATED	JH	MG
D	15/07/24	EARTHWORKS UPDATED	JH	MG
C	18/04/24	DESIGN UPDATED	ML	MG
B	21/09/23	EARTHWORKS VOL. AMENDED	JH	MG
A	20/07/23	ORIGINAL ISSUE	TGP	MG


DIMENSIONS IN METRES EXCEPT WHERE SHOWN OTHERWISE. A1 UNREDUCED
CULVERT AND PIPE SIZES IN MILLIMETRES A3 REDUCED

Scale:
0 5 10 15 20m
1:250 (A1) 1:500 (A3)

PROJECT NORTH POINT



Designed: JH	Drafted: ML
Approved: MG	
RPEQ: 16939	
Signed:	
Date: 18/04/2024	
Drawing No: 6182 ENG BE 051	Revision: E

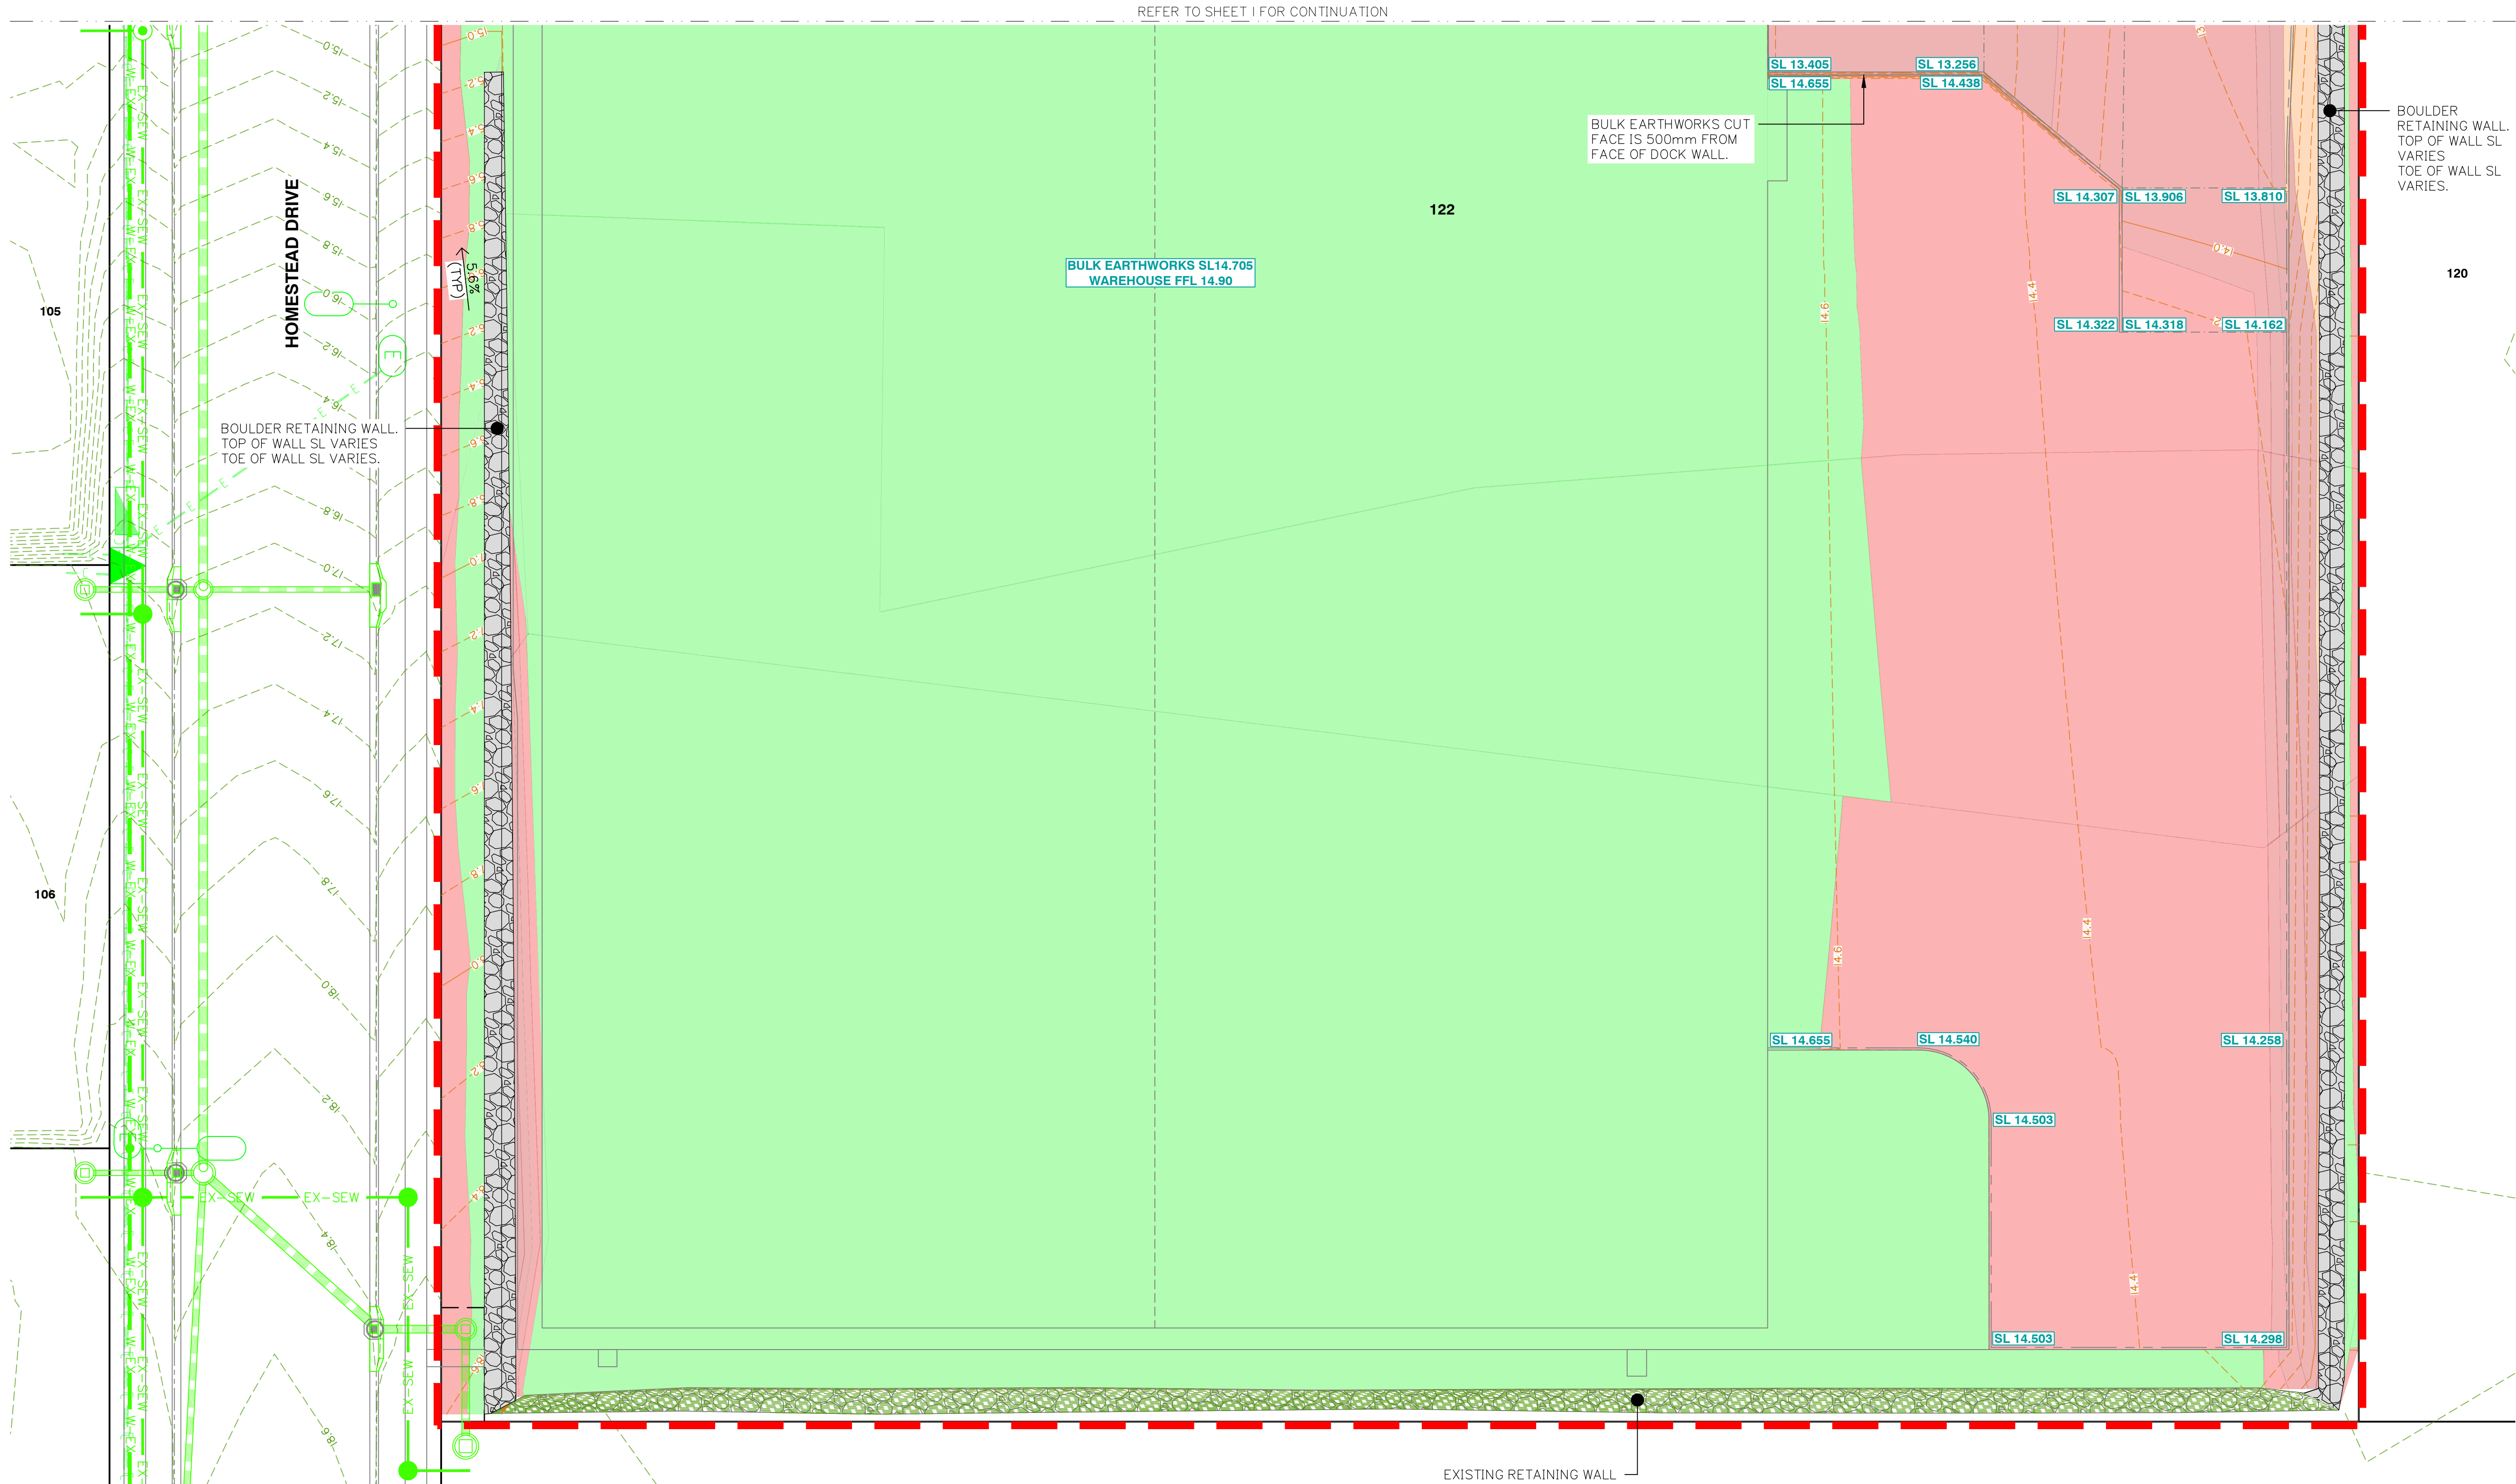

BULK EARTHWORKS DEPTH RANGE LEGEND											
-10.0 to -4.0 m		-2.0 to -1.5 m		0 to 0.5 m		2.5 to 3.0 m					
-4.0 to -3.5 m		-1.5 to -1.0 m		0.5 to 1.0 m		3.0 to 3.5 m					
-3.5 to -3.0 m		-1.0 to -0.5 m		1.0 to 1.5 m		3.5 to 4.0 m					
-3.0 to -2.5 m		-0.5 to 0 m		1.5 to 2.0 m		4.0 to 10.0 m					
-2.5 to -2.0 m				2.0 to 2.5 m							

EARTHWORKS VOLUME SUMMARY (UNDER BUILDING SLAB)

CUT	- m ³
FILL	1,259 m ³
TOTAL BALANCE	1,259 m ³

NOTE: FILL UNDER SLAB TO BE MIN 35mm THICK TYPE 2.5 (CBR15) CRUSHED ROCK SIZE 14. REFER TO STRUCTURAL PLANS FOR DETAILS


- EARTHWORKS LEVELS SHOWN ARE TO UNDER SIDE OF SLAB/PAVEMENT AND BINDING LAYER.
- EARTHWORKS CUT FILL IS OFFSET 500mm BEHIND FACE OF RECESSED DOCK WALL TO CATER FOR WALL AND BACKFILL REQUIREMENTS

EARTHWORKS VOLUME SUMMARY

CUT	-3,444.4 m ³
FILL	1,036.0 m ³
TOTAL BALANCE	-2,408.4 m ³

NOTE: EXCESS CUT MATERIAL TO BE REMOVE OFF SITE.

RETAINING WALLS SUBJECT TO BUILDING PERMIT AS PER OPW CONDITIONS

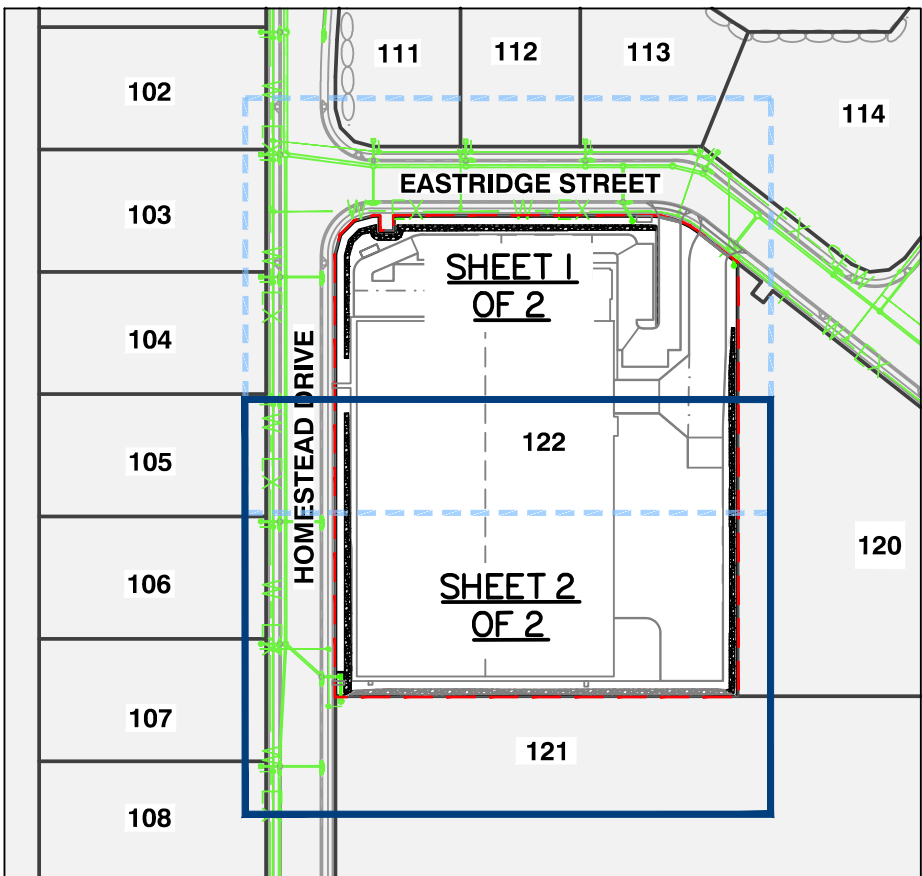

KEY PLAN
SCALE 1:2500