

STANDARD SIGNS AND LINEMARKING NOTES

1. GENERAL

- 1.1. ALL SIGNS AND PAVEMENT MARKING IS TO BE IN ACCORDANCE WITH THE DTMR QUEENSLAND MANUAL OF UNIFORM TRAFFIC CONTROL DEVICES (QLD MUTCD) AND REFERENCES AS1742 MANUAL OF UNIFORM TRAFFIC CONTROL DEVICES

2. SIGNS

- 2.1. ALL SIGNS TO BE REFLECTORISED CLASS 1 TO AS1906.1:2010 UNLESS NOTED OTHERWISE.
- 2.2. SIGNS ARE TO BE INSTALLED WITH THE FOLLOWING CLEARANCES TO EDGE OF SIGN. UNLESS MODIFIED BY LOCAL GOVERNMENT AUTHORITY. LOCATION:
- A) RURAL : AT LENGTH 600mm FROM
- i) OUTER EDGE OF ROAD SHOULDER
- ii) LINE OF GUIDE POSTS
- iii) FACE OF GUARD RAIL
- B) URBAN : KERBED ROADS
- i) 300mm FROM FACE OF KERB
- ii) 500mm TRAFFIC ISLANDS
- C) URBAN : UNKERBED , BIKE PATHS + JOINT - USE PATHS
- i) AT LEAST 600mm
- 2.3. SIGN ORIENTATION SHOULD BE IN ACCORDANCE WITH SECTION 1.12.3.4 (RURAL) OF THE QLD MUTCD.
- 2.4. MOUNTING HEIGHT TO BE IN ACCORDANCE WITH SECTIONS 1.12.3.5 (URBAN) & 1.12.3.5 OF THE QLD MUTCD.

3. SIGN SUPPORTS

- 3.1. SLEEVED SIGNS SUPPORTS ARE TO BE PROVIDED IN ALL AREAS WHERE THEY ARE IN A PAVED SURFACE.

4. LINEMARKING


- 4.1. REDUNDANT LINEMARKING IS TO BE GROUND OFF.
- 4.2. THERMOPLASTIC LINE MARKING TO BE USED FOR ALL HARD SURFACES. PREPARATION AS PER MANUFACTURERS RECOMMENDATIONS AND IN ACCORDANCE WITH DTMR SPECIFICATION.
- 4.3. ALL MARKINGS TO BE INSTALLED WITH A HIGH SKID RESISTANCE MATERIAL (e.g. CALCINE BAUXITE)



R1-2



D4-5

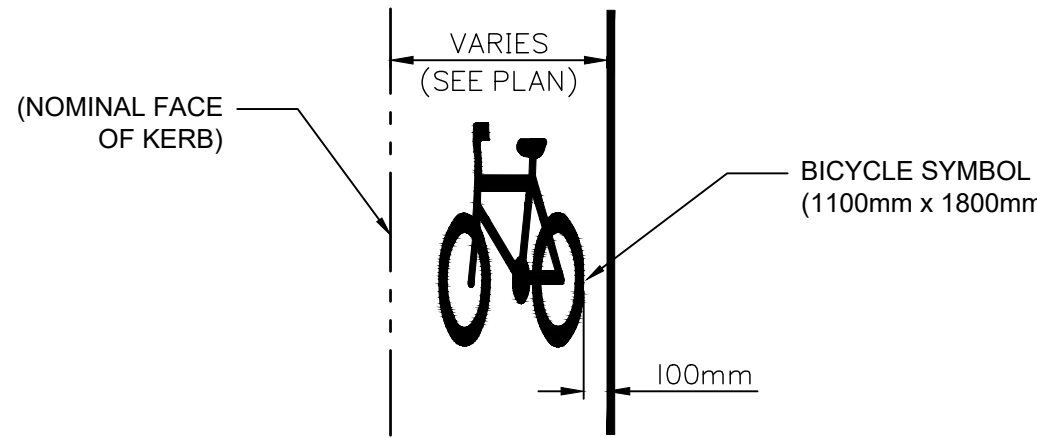

CYCLE LANE DETAIL

1. PAINT BICYCLE PAVEMENT SYMBOLS AT NOT MORE THAN 100m (MAX.) SPACINGS.

LINEMARKING LEGEND

TYPE	DESCRIPTION	DIMENSIONS
BDL	DIVIDING LINE TWO - LANE ROADS	
MDL	MULTILANE DIVIDING ROADS	
SBL	SINGLE BARRIER LINE	
ODBL	ONE DIRECTION BARRIER LINE	
DBL	BOTH DIRECTION BARRIER LINE	
CLL	CONTINUOUS LANE LINE	
SBLL	SPECIAL PURPOSE BROKEN LINE	
EL	EDGE LINE LEFT AND RIGHT SIDE	
CL	CONTINUITY LINE	
TL	TURN LINE	
OM	OUTLINE MARKING	
SL	STOP LINE	
GWL	GIVE WAY LINE	
HL	HOLD LINE	
PC	PEDESTRIAN CROSSWALK LINES	
PS	PARKING SPACE	
NS	NO STANDING	
SUP	SPECIAL USE PARKING SPACE	

NOTES:

1. ALL DIMENSIONS ARE IN METRES.
2. REFER TO AS 1742.3-2009 'MANUAL OF UNIFORM TRAFFIC CONTROL DEVICES' FOR APPLICATION OF LINE MARKING.
3. IF INDICATED ON THE DRAWINGS RRPM'S ARE TO BE INSTALLED IN ACCORDANCE WITH THE MUTCD.

RRPM LEGEND

- UNIDIRECTIONAL - WHITE
- ▷ UNIDIRECTIONAL - RED
- ◇ UNIDIRECTIONAL - YELLOW
- ◁ UNIDIRECTIONAL - GREEN
- BIDIRECTIONAL - WHITE
- ◇ BIDIRECTIONAL - YELLOW

*BLUE RETRO-REFLECTIVE PAVEMENT MARKERS ARE TO BE PLACED 100mm HYDRANT SIDE OF THE ROAD CENTERLINE MARKING, FOR ALL HYDRANT LOCATIONS.



planning | environment | landscape | engineering | survey
T: 3807 3333 | F: 3287 5461 | www.gassman.com.au
Gold Coast | 78 Business Street, Yatala QLD | PO Box 392, Beerleigh 4207

Client:



FPI QUEENSLAND
PTY. LTD.

Project:

VANTAGE YATALA
STAGE 3
EXTERNAL INTERSECTION

Site Address:

LOT 504 HOMESTEAD
DRIVE, STAPYLTON
QLD, 4207

RPD:

Lot: 504
Plan: SP329485
Local Authority: CITY OF GOLD COAST

Level Datum: AHD
Meridian:
PSM:
RL:

ISSUED FOR APPROVAL

©2012 Gassman Development Perspectives
All rights reserved. No part of this document may be reproduced or transmitted in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the written permission of Gassman Development Perspectives.
THIS DRAWING IS INTENDED TO BE PRINTED IN COLOUR. ALL DRAWINGS ARE TO BE READ IN CONJUNCTION WITH GENERAL NOTES.

Drawing Title:

SIGNS AND LINEMARKING
NOTES AND DETAILS

B	24/08/23	ISSUED FOR APPROVAL	JH	MG
A	16/08/23	ORIGINAL ISSUE	JH	MG
Rev	Date	Description	DRN	CHK

DIMENSIONS IN METRES EXCEPT WHERE SHOWN OTHERWISE. A1 UNREDUCED
CULVERT AND PIPE SIZES IN MILLIMETRES A3 REDUCED

Scale:

PROJECT NORTH POINT

Project No. 5941	
Designed: JH	Drafted: TGP
Approved:	MG
RPEQ	16939
Signed:	
Date:	24/08/2023
Drawing No: 5941 ENG EXT3 800	Revision B

