

ARCO & AODELI
LOT 334 ON SP 193431
84 CHRISTENSEN ROAD SOUTH
STAPYLTON, QUEENSLAND 4207

DRAWING INDEX

DRAWING No.	DESCRIPTION
8046-C01	LOCALITY PLAN, DRAWING INDEX AND GENERAL NOTES
8046-SW01	STORMWATER LAYOUT PLAN, NOTES AND LONGITUDINAL SECTION
8046-S01	SEWERAGE RETICULATION LAYOUT PLAN AND NOTES
8046-S02	SEWERAGE RETICULATION LONGITUDINAL SECTION
8046-W01	WATER RETICULATION LAYOUT PLAN AND DETAILS

GENERAL NOTES

1. ALL DIMENSIONS ARE IN METRES UNLESS NOTED OTHERWISE.

2. TOPSOIL IS TO BE STRIPPED AND REPLACED ON ALL DISTURBED EARTHWORKS AREAS WITHIN FOOTPATH AREA.

3. ALL TEMPORARY AND PERMANENT SIGNAGE AND LINEMARKING TO BE IN ACCORDANCE WITH MAIN ROADS STANDARDS (MANUAL OF UNIFORM TRAFFIC CONTROL DEVICES).

4. ALL DIMENSIONS ARE TO BE CHECKED ON-SITE BEFORE WORK COMMENCES.

5. DIMENSIONS SHALL NOT BE OBTAINED BY SCALING THE DRAWING.

6. DURING CONSTRUCTION BARRIERS, LIGHTS & SIGNS SHALL BE MAINTAINED TO ENSURE SAFE PASSAGE OF TRAFFIC AND PEDESTRIANS IN ACCORDANCE WITH THE REQUIREMENTS OF THE LOCAL AUTHORITY.

7. ALL WORKMANSHIP AND MATERIALS SHALL BE IN ACCORDANCE WITH S.A.A. CODES & BY-LAWS AND ORDINANCES OF THE RELEVANT LOCAL AUTHORITY AND WORKPLACE HEALTH AND SAFETY REQUIREMENTS.

8. THE CONTRACTOR SHALL BE RESPONSIBLE FOR NOTIFYING ALL RELEVANT AUTHORITIES AND PAYING ALL FEES NECESSARY BEFORE COMMENCING WORK, FOR LOCATING ALL EXISTING SERVICES AND FOR REPAIR OF ANY SERVICES DAMAGED AS A RESULT OF THE WORKS.

9. THE CLIENTS SURVEYOR SHALL PEG PIT LOCATION AND STAKE R.P. BOUNDARIES PRIOR TO CONSTRUCTION.
10. CONTRACTOR TO VERIFY ALL INVERT LEVELS, SURFACE LEVELS, COVER OVER DRAINAGE LINES, AND MINIMUM FALLS ARE CORRECT & OBTAINABLE PRIOR TO COMMENCEMENT OF WORK.

11. THE CONTRACTOR'S ATTENTION IS DRAWN TO THE REQUIREMENTS OF THE WORKPLACE HEALTH AND SAFETY ACT 1995. ALL WORK IS TO BE CARRIED OUT IN ACCORDANCE WITH THIS ACT AND IN PARTICULAR THE CONTRACTOR IS TO ENSURE THE REQUIREMENTS OF THIS SPECIFICATION WITH REGARD TO 'NOTIFICATION IN RELATION TO A NOTIFIABLE PROJECT, ARE FORFILLED.

12. ALL WORK SHALL BE CARRIED OUT IN ACCORDANCE WITH CURRENT GOOLD COAST CITY COUNCIL STANDARD DRAWINGS AND SPECIFICATIONS.

13. CONTRACTOR SHALL VERIFY BENCH MARK LEVELS AND ADVISE THE SUPERINTENDENT OF ANY DISCREPANCIES PRIOR TO COMMENCING CONSTRUCTION.

14. CONTRACTOR SHALL VERIFY THE LOCATION OF ALL EXISTING SERVICES PRIOR TO COMMENCEMENT OF WORK. ALL EXISTING SERVICES AND STRUCTURES ARE TO BE MAINTAINED IN GOOD ORDER FOR THE DURATION OF THE CONTRACT. ANY COST ASSOCIATED WITH REPAIRING DAMAGE TO EXISTING SERVICES SHALL BE PAID FOR BY THE CONTRACTOR.



LOCALITY PLAN
SCALE 1:5000

SCALE 1:5000 (A1)



DO NOT SCALE. CONFIRM ALL DIMENSIONS ON SITE.		
ISSUE	AMENDMENT	DATE
A	ISSUED FOR COMMENT	15.12.17
B	ISSUED FOR COUNCIL APPROVAL	18.12.17

REAL PROPERTY DESCRIPTION
LOT 334 ON SP 193431

PROJECT
84 CHRISTENSEN ROAD
SOUTH, STAPYLTON

CLIENT
SPACEFRAME BUILDINGS
PTY LTD

TITLE
LOCALITY PLAN, DRAWING
INDEX AND GENERAL NOTES




HCE Engineers
Hydraulic • CIVIL • Environmental

P.O. Box 7214,
Redland Bay,
QLD, 4165

Phone: (07) 3829 1399
mail@hce-engineers.com.au
6 Marine Street, Redland Bay

Designed MN	Drawn MN	Date 14.12.17
Approved		Scale AS SHOWN
Drawing No. 8046-C01		Rev. B

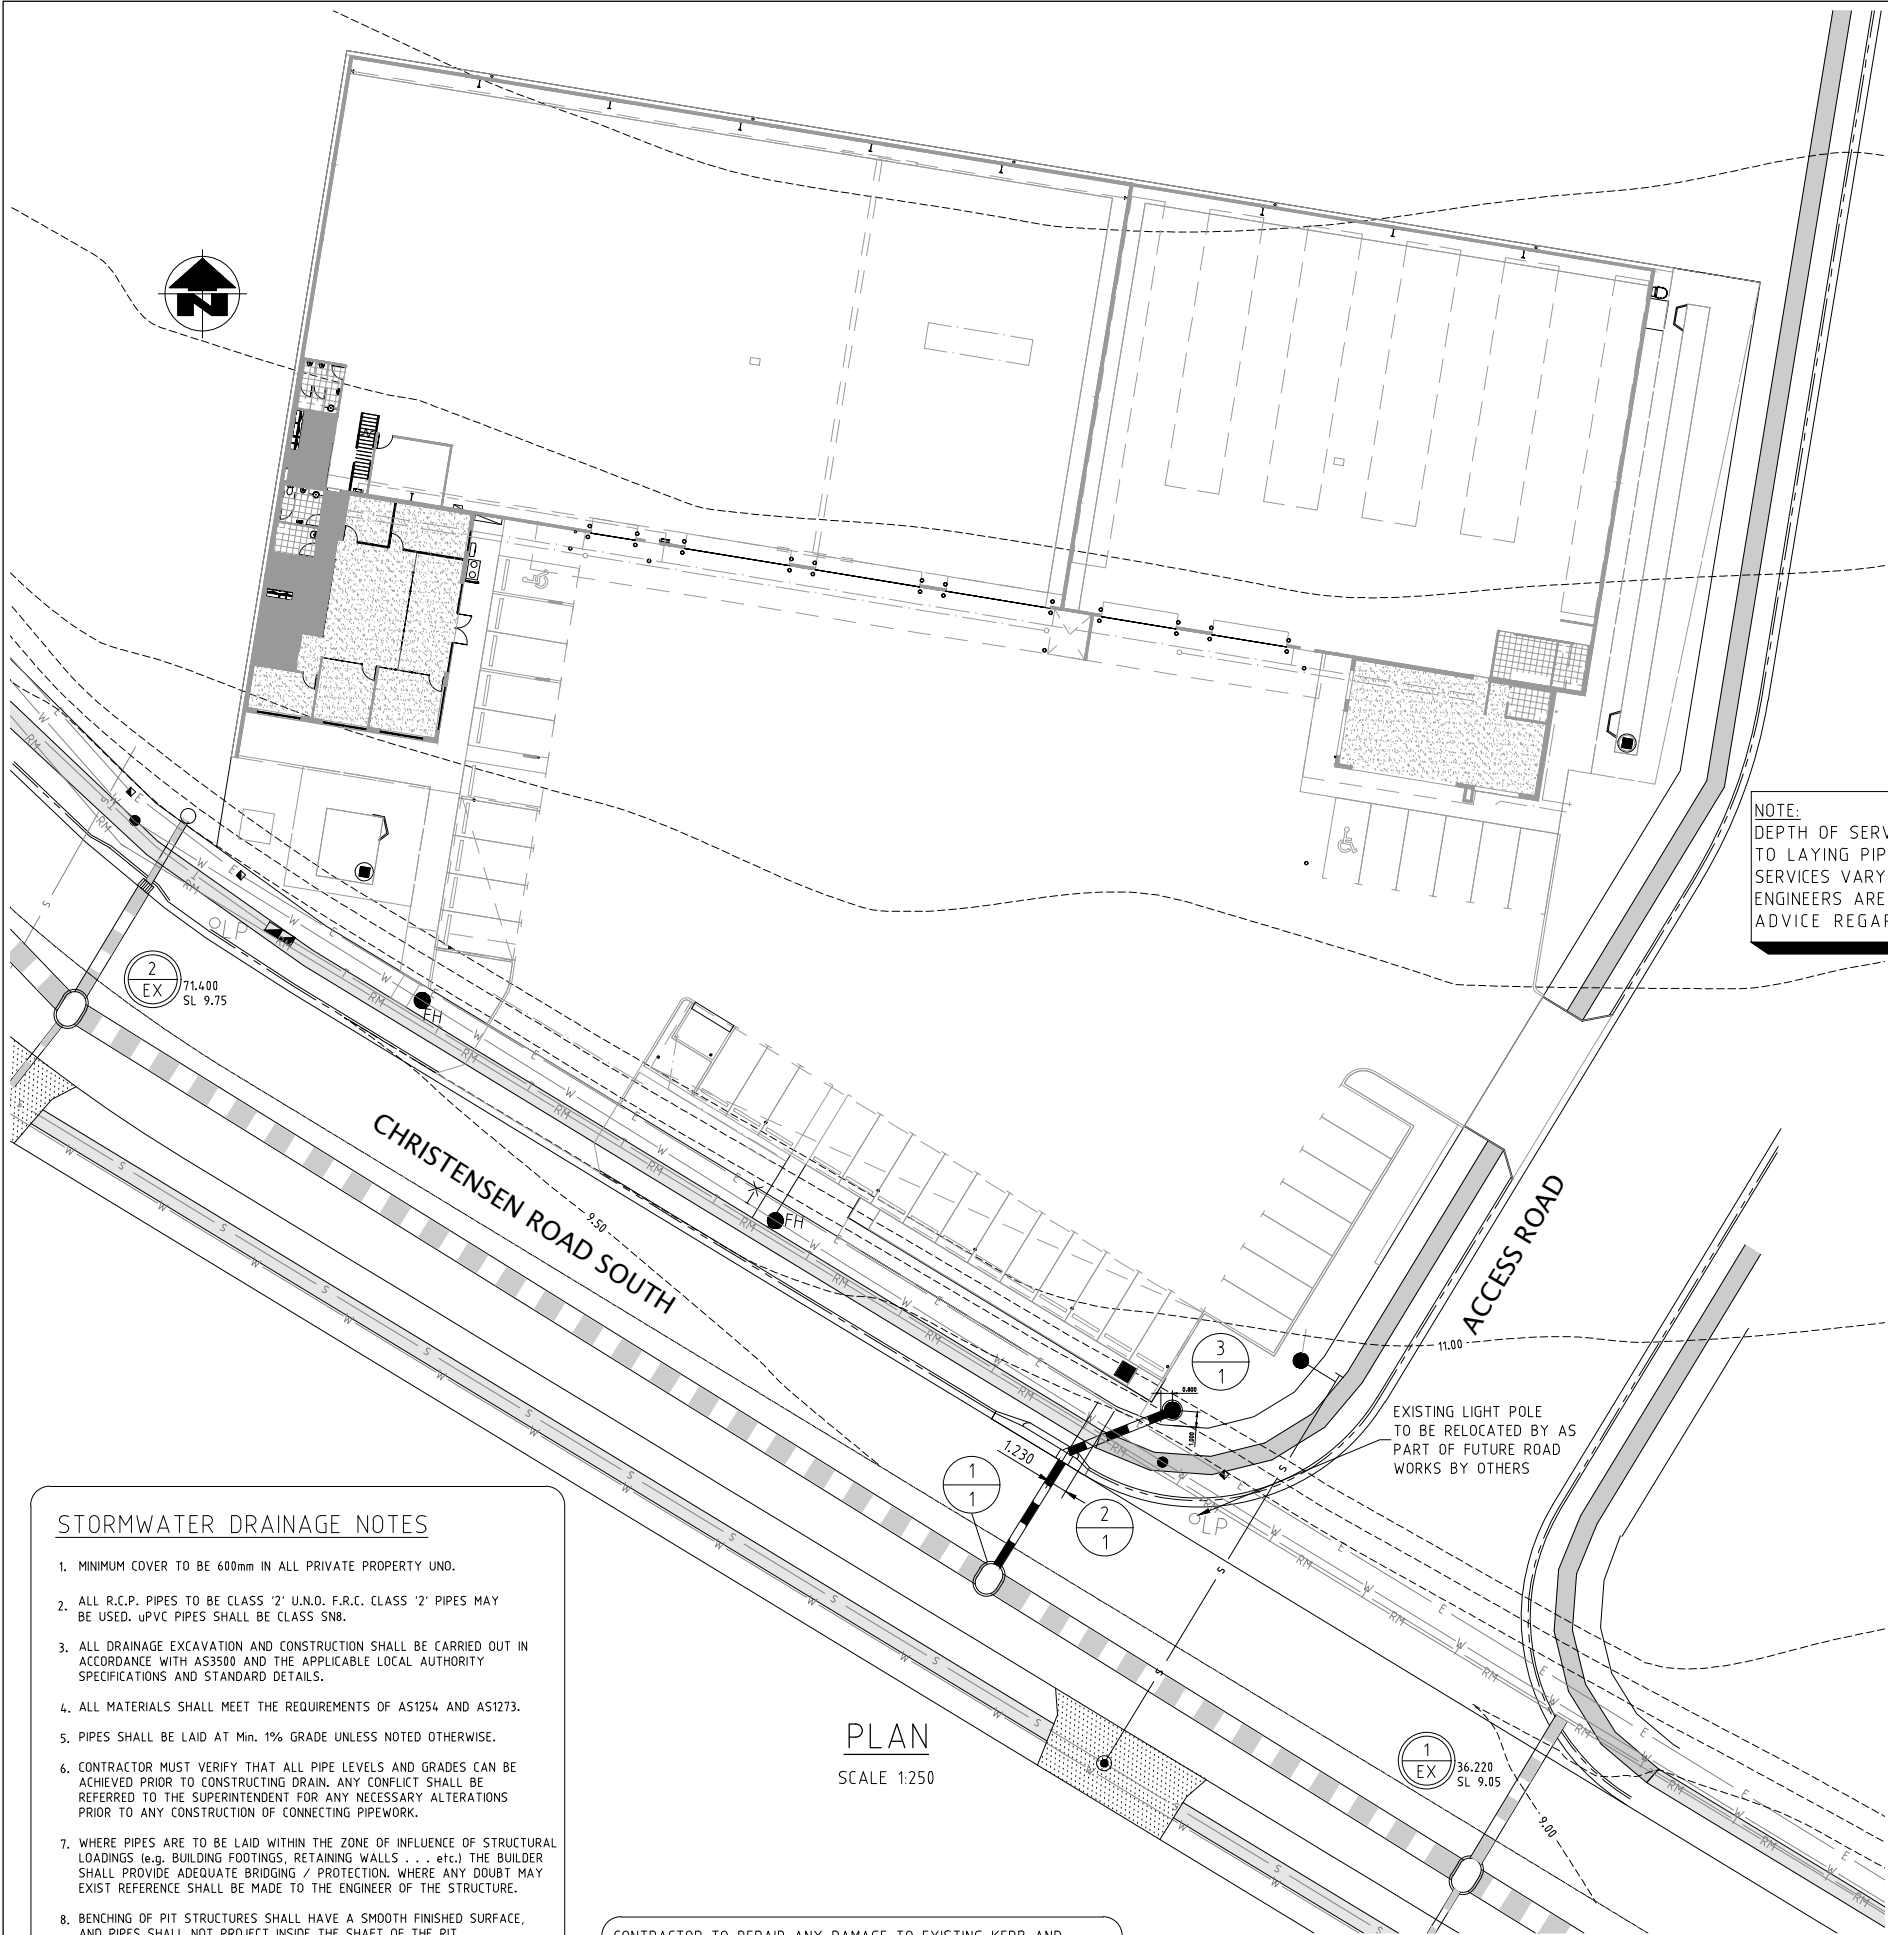

STORMWATER DRAINAGE NOTES

1. MINIMUM COVER TO BE 600mm IN ALL PRIVATE PROPERTY UNO.
2. ALL R.C.P. PIPES TO BE CLASS '2' U.N.O. F.R.C. CLASS '2' PIPES MAY BE USED. uPVC PIPES SHALL BE CLASS SN8.
3. ALL DRAINAGE EXCAVATION AND CONSTRUCTION SHALL BE CARRIED OUT IN ACCORDANCE WITH AS3900 AND THE APPLICABLE LOCAL AUTHORITY SPECIFICATIONS AND STANDARD DETAILS.
4. ALL MATERIALS SHALL MEET THE REQUIREMENTS OF AS1254 AND AS1273.
5. PIPES SHALL BE LAID AT Min. 1% GRADE UNLESS NOTED OTHERWISE.
6. CONTRACTOR MUST VERIFY THAT ALL PIPE LEVELS AND GRADES CAN BE ACHIEVED PRIOR TO CONSTRUCTING DRAIN. ANY CONFLICT SHALL BE REFERRED TO THE SUPERINTENDENT FOR ANY NECESSARY ALTERATIONS PRIOR TO ANY CONSTRUCTION OF CONNECTING PIPEWORK.
7. WHERE PIPES ARE TO BE LAID WITHIN THE ZONE OF INFLUENCE OF STRUCTURAL LOADINGS (e.g. BUILDING FOOTINGS, RETAINING WALLS . . . etc.) THE BUILDER SHALL PROVIDE ADEQUATE BRIDGING / PROTECTION. WHERE ANY DOUBT MAY EXIST REFERENCE SHALL BE MADE TO THE ENGINEER OF THE STRUCTURE.
8. BENCHING OF PIT STRUCTURES SHALL HAVE A SMOOTH FINISHED SURFACE, AND PIPES SHALL NOT PROJECT INSIDE THE SHAFT OF THE PIT.

THIS DESIGN HAS BEEN PREPARED BASED ON SERVICE AUTHORITY AS CONSTRUCTED INFORMATION. NO POT HOLING HAS BEEN UNDERTAKEN TO VERIFY EXISTING SERVICE LOCATIONS AND DEPTHS. IT IS THE CONTRACTORS RESPONSIBILITY TO UNDERTAKE POT HOLING TO VERIFY THE DESIGN.

CONTRACTOR TO REPAIR ANY DAMAGE TO EXISTING KERB AND CHANNEL OR ROADWAY. (INCLUDING THE REMOVAL OF CONCRETE SLURRY FROM FOOTWAYS, ROADS, KERB & CHANNEL, STORMWATER GULLIES AND DRAINLINES)

CONTRACTOR TO OBTAIN A PERMIT FROM THE ENGINEERING DELEGATE, DEVELOPMENT AND REGULATORY SERVICES TO CARRY OUT ANY WORKS WITHIN THE ROAD RESERVE

STRUCTURE No.

STRUCTURE NAME

EXISTING 100Ø TELSTRA CONDUIT ASSUMED COVER 450mm
EXISTING 150Ø WATER MAIN ASSUMED COVER 600mm
EXISTING 6x100Ø ELECTRICAL CONDUITS ASSUMED COVER 600mm
FUTURE SURFACE (APPROX) TAKEN FROM CIVIL DESIGN AT TIME OF STORMWATER DESIGN SUBJECT TO CHANGE

NOTE:
DEPTH OF SERVICES TO BE CONFIRMED PRIOR TO LAYING PIPE IN ROAD. IF THE DEPTH OF SERVICES VARY FROM THE DRAWING THEN HCE ENGINEERS ARE TO BE INFORMED TO PROVIDE ADVICE REGARDING AN AMENDED DESIGN

3	2	1
1	1	1
1050Ø MANHOLE WITH CLASS B LID IN ACCORDANCE WITH GCCC STD DRG 05-03-101		
LIP IN LINE STORMWATER GULLY WITH 'M LINTEL' IN ACCORDANCE WITH GCCC STD DRG 05-03-001		
1500Ø MANHOLE EXTENDED 900 WITH CLASS D LID IN ACCORDANCE WITH GCCC STD DRG 05-03-101 AND 05-03-103		

EXISTING 100Ø SEWER RISING MAIN IL 7.110 (CALC)	0.500 CLEAR APPROX	0.330 CLEAR APPROX	0.460 CLEAR APPROX	0.650 CLEAR APPROX	EXISTING 1350Ø
PRIVATE PROPERTY DATUM	5.000				
LOCATION	ROAD RESERVE				
DIAMETER	450Ø RCP (2)				
GRADE	1in100	1in50			
LENGTH	8.170	9.130			

DEPTH BELOW F.S.L.	1.860	1.470	1.500	1.790
INVERT LEVEL	7.840	7.760	7.730	7.550
FINISHED SURFACE LEVEL	9.700	9.230	9.340	9.340
EXISTING SURFACE LEVEL	10.500	9.230	9.340	9.340
PEGGED DISTANCE	0.000	8.170	17.300	

LINE No. 1

LONGITUDINAL SECTION

SCALES 1:500 (HORIZONTAL)
1:50 (VERTICAL)



DO NOT SCALE. CONFIRM ALL DIMENSIONS ON SITE. Copyright

ISSUE	AMENDMENT	DATE
A	ISSUED FOR COMMENT	13.12.17
B	ISSUED FOR COUNCIL APPROVAL	18.12.17

LEGEND

- 10.0--- EXISTING SURFACE CONTOURS
- EXISTING STORMWATER DRAINAGE
- PROPOSED STORMWATER DRAIN
- 1 1 PROPOSED DRAINAGE STRUCTURE
- 1 1 EXISTING DRAINAGE STRUCTURE
- S— EXISTING SEWERAGE
- S— PROPOSED SEWERAGE
- T— EXISTING TELECOMMUNICATIONS
- W— EXISTING WATER RETICULATION
- E— EXISTING UNDERGROUND ELECTRICAL
- RM— EXISTING RISING MAIN
- EXISTING ELECTRICAL PILLAR
- × PROPOSED WATER METER
- EXISTING FOOTPATH
- FUTURE FOOTPATH
- EXISTING CROSSOVER

REAL PROPERTY DESCRIPTION
LOT 334 ON SP 193431

PROJECT
84 CHRISTENSEN ROAD
SOUTH, STAPYLTON

CLIENT
SPACEFRAME BUILDINGS
PTY LTD


TITLE
STORMWATER LAYOUT
PLAN, NOTES AND
LONGITUDINAL SECTION



HCE Engineers
Hydraulic • Civil • Environmental

P.O. Box 7214, Redland Bay, QLD, 4165
Phone: (07) 3829 1399
mail@hce-engineers.com.au
6 Marine Street, Redland Bay

Designed MN	Drawn MN	Date 13.12.17
Approved		Scale AS SHOWN
Drawing No. 8046-SW01		Rev. B

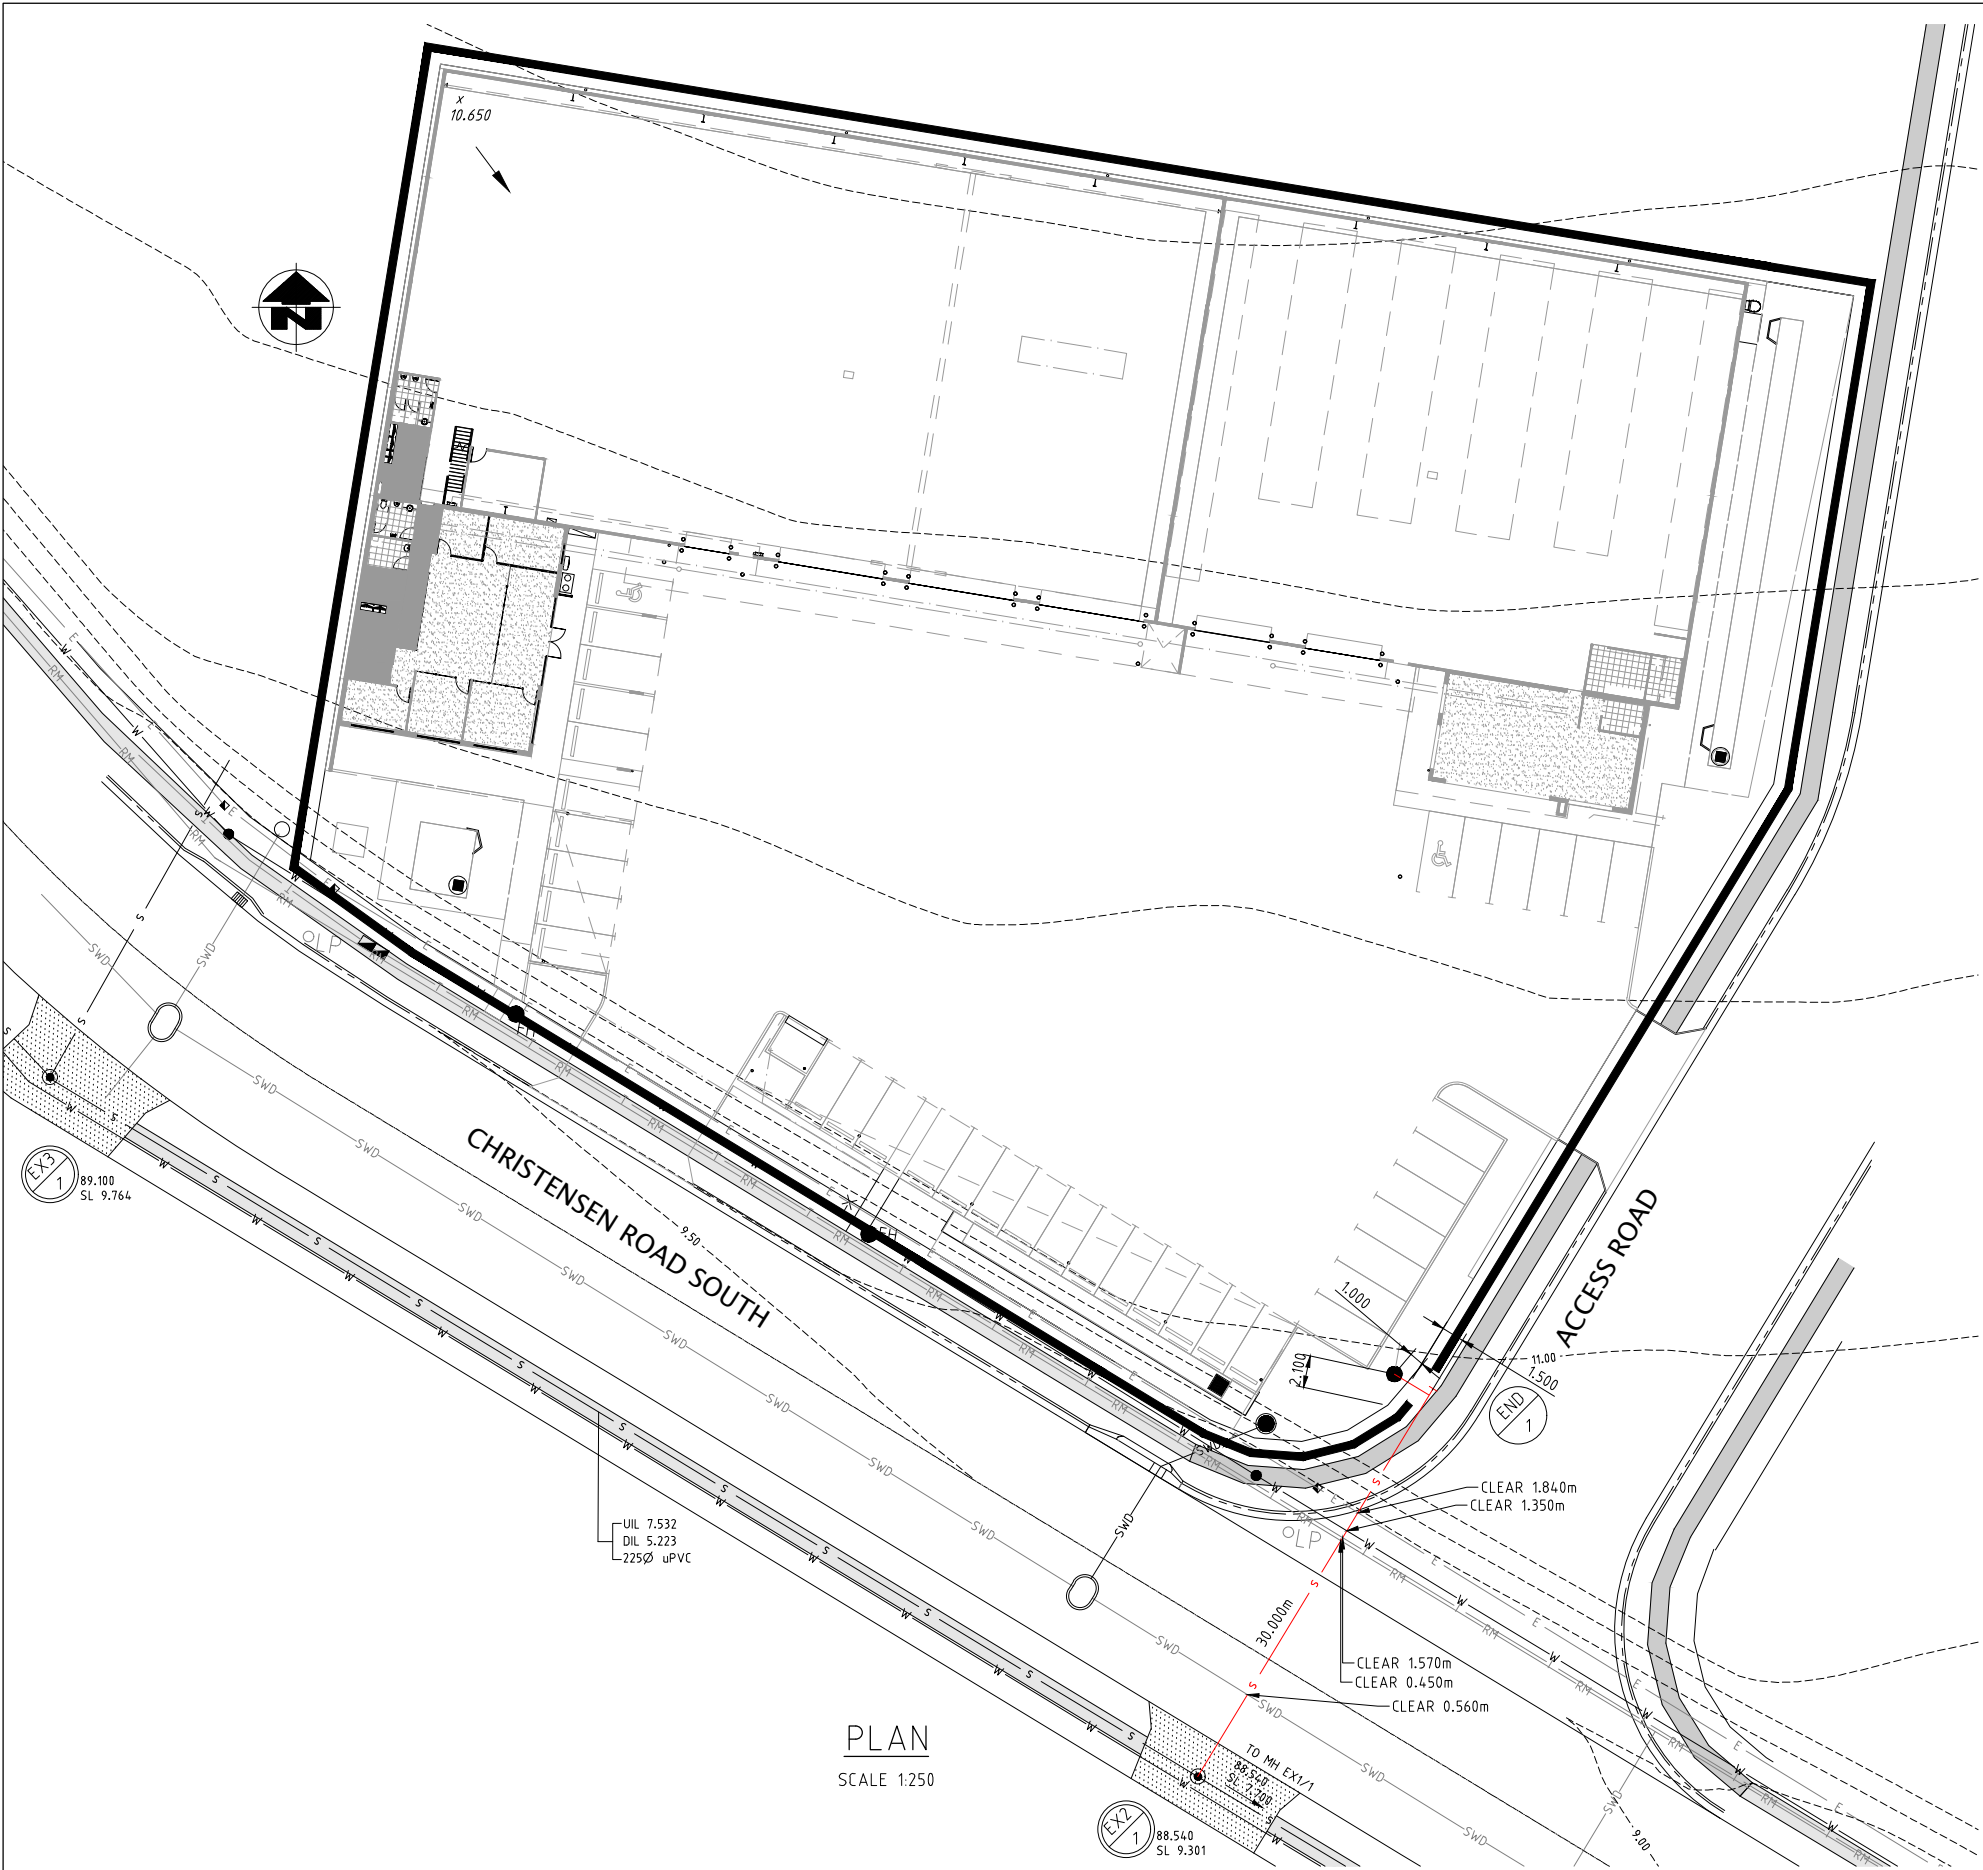

PLAN
SCALE 1:250

NOTE:
CONTRACTOR TO REINSTATE
EXISTING CROSSOVER UPON
COMPLETION OF SEWER WORKS

THIS DESIGN HAS BEEN PREPARED BASED ON SERVICE AUTHORITY AS CONSTRUCTED INFORMATION. NO POT HOLING HAS BEEN UNDERTAKEN TO VERIFY EXISTING SERVICE LOCATIONS AND DEPTHS. IT IS THE CONTRACTORS RESPONSIBILITY TO UNDERTAKE POT HOLING TO VERIFY THE DESIGN.

SEWER NOTES

- ALL WORK AND MATERIALS SHALL BE IN ACCORDANCE WITH CURRENT SEQ. WATER SUPPLY AND SEWERAGE DESIGN AND CONSTRUCTION CODE (SEQ. WS&S D&C) STANDARDS AND ADDITIONAL GCCC REQUIREMENTS.
- UNLESS SPECIFIED OTHERWISE ALL MATERIALS AND WORK SHALL COMPLY WITH THE RELEVANT AUSTRALIAN STANDARDS.
- THE CONSTRUCTION OF THE SEWERAGE WORK SHOWN ON THIS DRAWING SHALL BE SUPERVISED BY AN ENGINEER WHO HAS RPEQ REGISTRATION. SEWERAGE WORKS NOT COMPLYING WITH THIS REQUIREMENT WILL NOT BE PERMITTED TO CONNECT INTO COUNCIL'S SEWERAGE SYSTEM.
- ALL WORK ASSOCIATED WITH LIVE SEWERS OR MAINTENANCE HOLES SHALL BE CARRIED OUT BY THE DEVELOPER'S APPROVED CONTRACTOR UNDER THE SUPERVISION OF GOLD COAST CITY COUNCIL AT THE DEVELOPER'S EXPENSE.
- ALL PIPES AND MATERIALS SHALL COMPLY WITH THE REQUIREMENTS OF THE "ACCEPTED PRODUCTS AND MATERIALS LIST".
- EACH ALLOTMENT SHALL BE SERVED BY A 100Ø PROPERTY CONNECTION. FOR ALLOTMENTS OTHER THAN SINGLE RESIDENTIAL, A 150Ø PROPERTY CONNECTION SHALL BE PROVIDED. A MAXIMUM OF 2 RESIDENTIAL PREMISES IS ALLOWED ON A 100Ø. PROPERTY CONNECTION SEWER DETAILS SHALL COMPLY WITH THE DETAILS GIVEN IN THE SEQ WS&S D&C STANDARD DRAWINGS - SEWERAGE SEQ-SEW-1106-1 TO 1106-7.
- PROPERTY CONNECTION BRANCHES SHALL EXTEND INTO THE PROPERTY A MINIMUM OF 500mm AND A MAXIMUM OF 1000mm.
- PROPERTY CONNECTIONS SHALL BE LOCATED A MINIMUM OF 500mm FROM THE PROPERTY BOUNDARY WHERE POSSIBLE.
- WHERE PIPES ARE LAID IN FILL, THE FILLING SHALL BE CARRIED OUT IN LAYERS NOT EXCEEDING 300mm (LOOSE) IN DEPTH AND SHALL BE COMPACTED UNTIL THE COMPACTION IS NOT LESS THAN 95% OF THE MATERIALS MAXIMUM COMPACTION WHEN TESTED IN ACCORDANCE WITH AS 1289 (MODIFIED COMPACTION). TESTING SHALL BE CARRIED OUT AFTER EACH ALTERNATIVE LAYER. IN ALL SUCH CASES APPROVAL OF CONSTRUCTED SEWERS WILL NOT BE ISSUED BY THE COUNCIL UNLESS CERTIFICATES ARE PRODUCED CERTIFYING THAT THE REQUIRED COMPACTION HAS BEEN ACHIEVED. PVC SEWERS SHALL BE INSTALLED IN ACCORDANCE WITH THE REQUIREMENTS FOR NON-PRESSURE PIPELINES SPECIFIED IN WSA-02.
- WHERE SEWERS HAVE A GRADE OF 1 IN 20 OR STEEPER, BULKHEADS SHALL BE CONSTRUCTED IN ACCORDANCE WITH CL.8.10, 17.5 AND 17.6 OF THE SEQ WS&S D&C CODE AMENDMENTS TO WSA-02.
- THE CONTRACTOR SHALL VERIFY THE LOCATION AND DEPTH OF EXISTING SERVICES WITH RELEVANT AUTHORITIES BEFORE COMMENCING WORKS.
- SEWERS SHALL BE DISUSED/ABANDONED IN ACCORDANCE WITH PROCEDURES SET OUT IN CL.4.2.6 OF THE SEQ WS&S D&C CODE AMENDMENTS TO WSA 02.
- PROPERTY CONNECTION MARKERS ARE TO BE INSTALLED IN ACCORDANCE WITH STANDARD DRAWING No. SEQ-SEW-1106-2 ON ALL PROPERTY CONNECTIONS, EXCEPT WHERE THE PROPERTY CONNECTION IS PROVIDED FROM A MAINTENANCE HOLE OR PRIVATE DRAINAGE IS CONNECTED TO THE PROPERTY CONNECTION AS PART OF THE WORKS.
- ALL PVC PIPES AND CONNECTIONS TO BE INSTALLED BY AN ACCREDITED CONTRACTOR.
- ALL LEVELS TO A.H.D.
- EMBEDMENT AND TRENCHING IN ACCORDANCE WITH (SEQ WS&S D&C) STD DRG SEQ-SEW-1200-2.
 - BEDDING - SPECIAL BEDDING SHALL BE SPECIFIED IF THE TRENCH FLOOR HAS:
 - IRREGULAR OUTCROPS OF ROCK
 - AHBP OF <50kPa (SEE SEQ-WAT-1200-01) OR,
 - UNCONTROLLED GROUND WATER HAS DISTURBED THE FLOOR OF THE TRENCH
 - EMBEDMENT, TRENCH FILL AND COMPACTION TO MEET THE REQUIREMENTS OF WSA-02 PART 3 AND THE RELEVANT SEQ-SP
 - SIDES OF EXCAVATION TO BE KEPT VERTICAL TO AT LEAST 150mm ABOVE THE PIPE
 - DESIGNER TO CHECK ON RELEVANT AUTHORITIES' REQUIREMENTS ADDITIONAL INFORMATION PROVIDED IN SEQ-SEW-1200 SERIES.

NAME OF ESTATE	84 CHRISTENSEN ROAD SOUTH STAPYLTON	
SUBDIVIDER	SPACEFRAME BUILDINGS PTY LTD	
APPLICATION NO.		
SP DELEGATE	GOLD COAST CITY COUNCIL	
APPROVAL DATE		
DRAWING/PLAN NO.		
No. OF ALLOTS.	1	
AREA IN ha.	0.6293	
LENGTH OF SEWER	100Ø	
	150Ø	32.700
	225Ø	
REFERENCE		

SCALE 1:250 (A1)
(SCALE BEFORE REDUCTION)

SCALE 1:2500 (A1)
(SCALE BEFORE REDUCTION)

DO NOT SCALE.
CONFIRM ALL DIMENSIONS ON SITE.

ISSUE	AMENDMENT	DATE
A	ISSUED FOR COMMENT	13.12.17
B	ISSUED FOR COUNCIL APPROVAL	18.12.17

LEGEND

- S—●— EXISTING SEWERAGE RETICULATION
- S—●— PROPOSED SEWERAGE RETICULATION
- S—+— PROPOSED PROPERTY CONNECTION
- 35--- EXISTING SURFACE CONTOURS
- 1/1 PROPOSED SEWERAGE STRUCTURE
- 1/1 EXISTING SEWERAGE STRUCTURE
- SWD— PROPOSED STORMWATER DRAINAGE
- SWD— EXISTING STORMWATER DRAINAGE
- T— EXISTING TELECOMMUNICATIONS
- W— EXISTING WATER RETICULATION
- E— EXISTING UNDERGROUND ELECTRICAL
- 39.72 x ALLOTMENT CONTROL POINT (NOT FOR CONSTRUCTION PURPOSES)
- LOTS TO BE SEWERED
- EXISTING FOOTPATH
- FUTURE FOOTPATH
- EXISTING CROSSOVER

REAL PROPERTY DESCRIPTION
LOT 334 ON SP 193431

PROJECT
84 CHRISTENSEN ROAD
SOUTH, STAPYLTON


CLIENT
SPACEFRAME BUILDINGS
PTY LTD
TITLE
SEWERAGE RETICULATION
LAYOUT PLAN AND NOTES

HCE Engineers
Hydraulic • CIVIL • Environmental

P.O. Box 7214, Redland Bay, QLD, 4165
Phone: (07) 3829 1399
mail@hce-engineers.com.au
6 Marine Street, Redland Bay

Designed MN	Drawn MN	Date 13.12.17
Approved		Scale AS SHOWN
Drawing No. 8046-S01		Rev. B

NOTE:
DEPTH OF SERVICES TO BE CONFIRMED PRIOR TO LAYING PIPE IN ROAD. IF THE DEPTH OF SERVICES VARY FROM THE DRAWING THEN HCE ENGINEERS ARE TO BE INFORMED TO PROVIDE ADVICE REGARDING AN AMENDED DESIGN

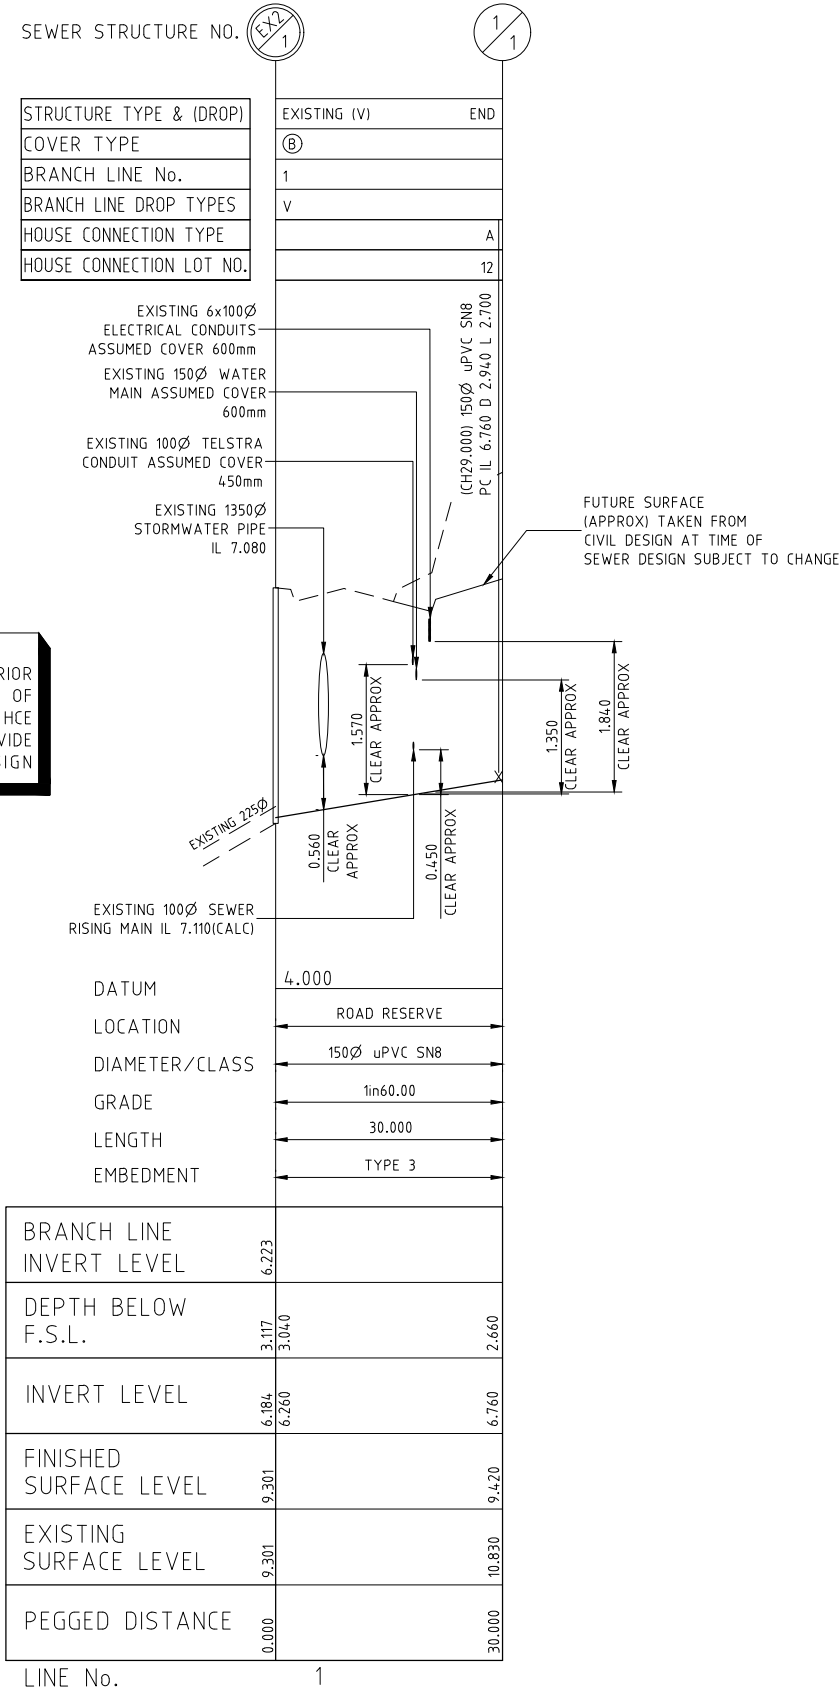

LONGITUDINAL SECTION

SCALES 1:500 (HORIZONTAL)
1:50 (VERTICAL)

THIS DESIGN HAS BEEN PREPARED BASED ON SERVICE AUTHORITY AS CONSTRUCTED INFORMATION. NO POT HOLING HAS BEEN UNDERTAKEN TO VERIFY EXISTING SERVICE LOCATIONS AND DEPTHS. IT IS THE CONTRACTORS RESPONSIBILITY TO UNDERTAKE POT HOLING TO VERIFY THE DESIGN.

ENVIRONMENTAL NOTES:

NOTE: ALL ENVIRONMENTAL PROTECTION MEASURES SHOULD BE IMPLEMENTED PRIOR TO ANY CONSTRUCTION WORK, INCLUDING CLEARING, COMMENCING.

VEGETATION PROTECTION

- TREES LOCATED ALONG THE FOOTPATH SHALL BE, WHERE POSSIBLE, TRANSPLANTED PRIOR TO CONSTRUCTION, OR REPLACED IF DESTROYED.
- WHEN WORKING WITHIN 4m OF TREES, RUBBER OR HARDWOOD GIRDLES WITH 1.8m BATTENS CLOSELY SPACED AND ARRANGED VERTICALLY FROM GROUND LEVEL. GIRDLES MUST BE STRAPPED TO TREES PRIOR TO CONSTRUCTION AND REMAIN UNTIL COMPLETION.
- TREE ROOTS SHOULD BE TUNNELLED UNDER, RATHER THAN SEVERED. IF ROOTS ARE SEVERED THE DAMAGED AREA SHOULD BE TREATED WITH A SUITABLE FUNGICIDE. CONTACT RELEVANT ARBORIST FOR FURTHER ADVICE.
- ANY TREE LOPPING REQUIRED SHOULD BE UNDERTAKEN BY AN APPROVED ARBORIST.

SOIL

- TOPSOIL AND SUBSOIL SHOULD BE STOCKPILED SEPARATELY.
- CARE SHOULD BE TAKEN TO PREVENT SEDIMENT FROM ENTERING THE STORMWATER SYSTEM. THIS MAY INVOLVE PLACING APPROPRIATE SEDIMENT CONTROLS AROUND THE STOCKPILES.

CREEK CROSSINGS

- SILTATION CONTROL MEASURES SHOULD BE PLACED DOWNSTREAM OF ANY EXCAVATION WORK.
- APPROPRIATE SEDIMENT CONTROL MEASURES SHOULD BE USED TO PREVENT SEDIMENT FROM ENTERING THE CREEK.
- NO SOIL SHOULD BE STOCKPILED WITHIN 5m OF THE CREEK.

REHABILITATION

- PRE-DISTURBANCE SOIL PROFILES AND COMPACTION LEVELS ARE TO BE REINSTATED.
- PRE-DISTURBANCE VEGETATION PATTERNS SHOULD BE RESTORED.

SAFETY

- THE DESIGN AND CONSTRUCTION OF THE WORKS SHALL COMPLY WITH ALL QUEENSLAND LEGISLATION.

DO NOT SCALE.
CONFIRM ALL DIMENSIONS ON SITE.

Copyright

ISSUE	AMENDMENT	DATE
A	ISSUED FOR COMMENT	13.12.17
B	ISSUED FOR COUNCIL APPROVAL	18.12.17

REAL PROPERTY DESCRIPTION
LOT 334 ON SP 193431

PROJECT
84 CHRISTENSEN ROAD
SOUTH, STAPYLTON

CLIENT
SPACEFRAME BUILDINGS
PTY LTD

TITLE
SEWERAGE RETICULATION
LONGITUDINAL SECTION




HCE Engineers

Hydraulic • CIVIL • Environmental

P.O Box 7214, Phone: (07) 3829 1399
Redland Bay, mail@hce-engineers.com.au
QLD, 4165 6 Marine Street, Redland Bay

Designed MN	Drawn MN	Date 13.12.17
Approved	Scale AS SHOWN	Rev. B
Drawing No. 8046-S02		

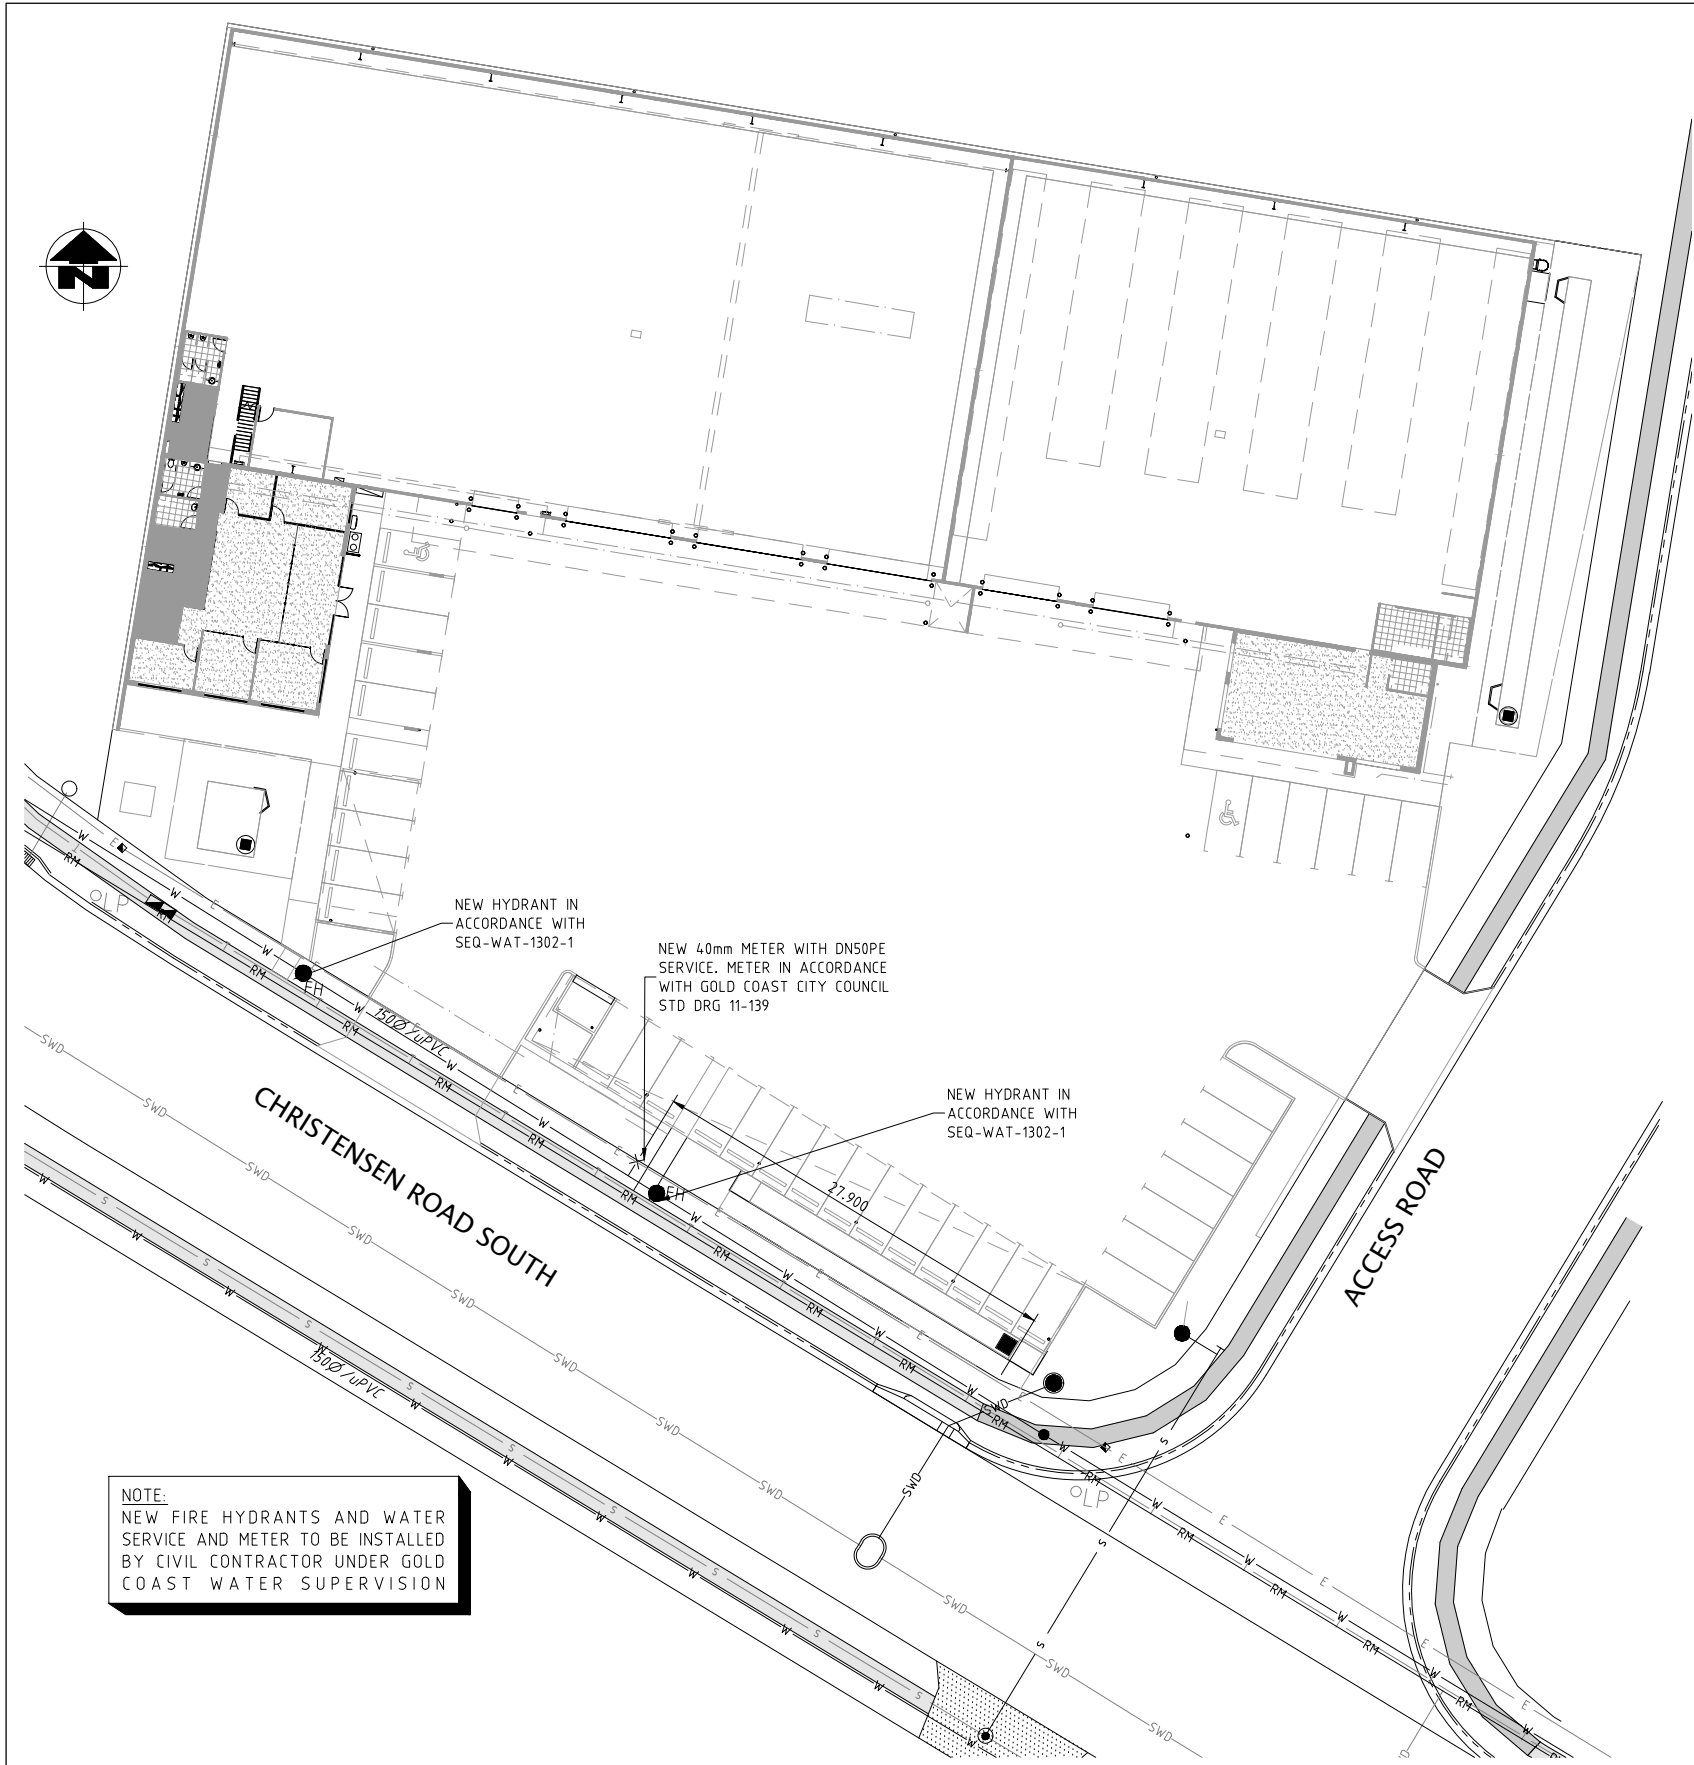

PLAN


SCALE 1:250

NOTE:
NEW FIRE HYDRANTS AND WATER SERVICE AND METER TO BE INSTALLED BY CIVIL CONTRACTOR UNDER GOLD COAST WATER SUPERVISION

IT IS THE CONTRACTORS RESPONSIBILITY TO CONTACT 'DIAL BEFORE YOU DIG' PH.1100 FOR THE LOCATION OF EXISTING PUBLIC UTILITIES PRIOR TO EXCAVATION. ANY DAMAGE CAUSED TO EXISTING PUBLIC UTILITIES BY THE CONTRACTOR WILL BE REPAIRED BY THE RELEVANT AUTHORITY AT THE CONTRACTORS EXPENSE.

THIS DESIGN HAS BEEN PREPARED BASED ON SERVICE AUTHORITY AS CONSTRUCTED INFORMATION. NO POT HOLING HAS BEEN UNDERTAKEN TO VERIFY EXISTING SERVICE LOCATIONS AND DEPTHS. IT IS THE CONTRACTORS RESPONSIBILITY TO UNDERTAKE POT HOLING TO VERIFY THE DESIGN.

NOTE:
ALL WATER AND SEWERAGE CONSTRUCTION WORK UNDERTAKEN BY THE CONTRACTOR SHALL COMPLY WITH THE REQUIREMENTS OF THE QUEENSLAND WORK HEALTH AND SAFETY ACT 2011.
CONTACT YOUR NEAREST OFFICE OF THE DIVISION OF WORKPLACE HEALTH AND SAFETY FOR INFORMATION.
PHONE : 1300 369915

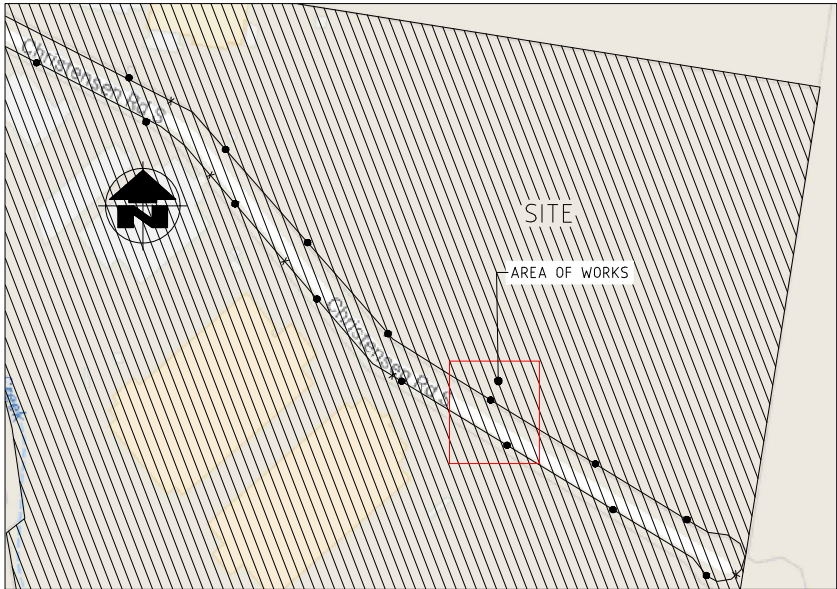

WATER LOCALITY PLAN

SCALE 1:2500

NOTES

- ALL WORK AND MATERIALS SHALL BE IN ACCORDANCE WITH CURRENT GCCC SPECIFICATIONS AND STANDARDS.
- UNLESS SPECIFIED OTHERWISE, ALL MATERIALS AND WORK SHALL COMPLY WITH THE RELEVANT AUSTRALIAN STANDARDS.
- ADOPT TOP OF KERB AS PERMANENT LEVEL.
- COVER ON MAINS FROM PERMANENT LEVEL TO BE AS FOLLOWS U.M.O.
100 & 150Ø (DN63, 125 & 180 FOR PE100) - 600mm
200, 250 & 300Ø (DN250, 315 & 355 FOR PE100)-1000mm
- CONDUITS TO BE INSTALLED IN ACCORDANCE WITH GCCC SPECIFICATIONS.
- A WATER METER, SUPPLIED AT THE DEVELOPER'S COST, IS TO BE INSTALLED AT THE SERVICE POINT OF EACH LOT IN ACCORDANCE WITH STD DRG. No. 08-06-108.
- U.P.V.C. PIPES SHALL BE SERIES 2 CLASS 16 AND COMPLY WITH A.S.1477. MPVC PIPES SHALL BE SERIES 2 CLASS 16 AND COMPLY WITH A.S.4765. FITTINGS SHALL BE CEMENT LINED GREY IRON IN ACCORDANCE WITH A.S.2544; OR DUCTILE IRON CEMENT LINED (DICI) IN ACCORDANCE WITH A.S.2280. DICI PIPES & FITTINGS SHALL BE PN16 OR PN35 AND COMPLY WITH A.S.2280. PIPES & FITTINGS SHALL BE POLYETHYLENE SLEEVED. MILD STEEL (MSCL) PIPES TO COMPLY WITH A.S.1579 AND BE CEMENT LINED IN ACCORDANCE WITH A.S.1281. PIPE COATING TO COMPLY WITH A.S.4321 (SINTAKOTE III). POLYETHYLENE PIPES OF 63 OD SHALL BE CLASS PN16 PE80B AND COMPLY WITH A.S.4130. FITTINGS SHALL COMPLY WITH A.S.1460.
- ALL CONCRETE FOOTPATHS TO BE CLEAR OF WATER MAIN ALLOCATION.
- TEST/CHLORINATION POINTS TO BE INSTALLED IN ACCORDANCE WITH GCCC STANDARDS
- CONSTRUCTION OF THE WATER RETICULATION WORK SHOWN ON THIS DRAWING MUST BE SUPERVISED BY AN ENGINEER WHO HAS RPEQ REGISTRATION. WORKS NOT COMPLYING WITH THIS REQUIREMENT WILL NOT BE PERMITTED TO CONNECT INTO GCCC'S RETICULATION SYSTEM.
- ALL DISTURBED AREAS TO BE TOPSOILED AND TURFED.
- PROPOSED AND EXISTING WATER METER BOXES TO BE CLEANED OF DIRT AND DEBRIS PRIOR TO PLAN SEALING.
- ALL LIVE CONNECTIONS SHALL BE UNDERTAKEN BY DEVELOPER/APPROVED CONTRACTOR UNDER GOLD COAST WATER SUPERVISION AT THE DEVELOPERS EXPENSE.

ENVIRONMENTAL NOTES:

- NOTE: ALL ENVIRONMENTAL PROTECTION MEASURES SHOULD BE IMPLEMENTED PRIOR TO ANY CONSTRUCTION WORK, INCLUDING CLEARING, COMMENCING.
- VEGETATION PROTECTION**
- TREES LOCATED ALONG THE FOOTPATH SHALL BE, WHERE POSSIBLE, TRANSPLANTED PRIOR TO CONSTRUCTION, OR REPLACED IF DESTROYED.
 - WHEN WORKING WITHIN 4m OF TREES, RUBBER OR HARDWOOD GIRDLES WITH 1.8m BATTENS CLOSELY SPACED AND ARRANGED VERTICALLY FROM GROUND LEVEL. GIRDLES MUST BE STRAPPED TO TREES PRIOR TO CONSTRUCTION AND REMAIN UNTIL COMPLETION.
 - TREE ROOTS SHOULD BE TUNNELLED UNDER, RATHER THAN SEVERED. IF ROOTS ARE SEVERED THE DAMAGED AREA SHOULD BE TREATED WITH A SUITABLE FUNGICIDE. CONTACT RELEVANT ARBORIST FOR FURTHER ADVICE.
 - ANY TREE LOPPING REQUIRED SHOULD BE UNDERTAKEN BY AN APPROVED ARBORIST.
- SOIL**
- TOPSOIL AND SUBSOIL SHOULD BE STOCKPILED SEPARATELY.
 - CARE SHOULD BE TAKEN TO PREVENT SEDIMENT FROM ENTERING THE STORMWATER SYSTEM. THIS MAY INVOLVE PLACING APPROPRIATE SEDIMENT CONTROLS AROUND THE STOCKPILES.
- CREEK CROSSINGS**
- SILTATION CONTROL MEASURES SHOULD BE PLACED DOWNSTREAM OF ANY EXCAVATION WORK.
 - APPROPRIATE SEDIMENT CONTROL MEASURES SHOULD BE USED TO PREVENT SEDIMENT FROM ENTERING THE CREEK.
 - NO SOIL SHOULD BE STOCKPILED WITHIN 5m OF THE CREEK.
- REHABILITATION**
- PRE-DISTURBANCE SOIL PROFILES AND COMPACTION LEVELS ARE TO BE REINSTATED.
 - PRE-DISTURBANCE VEGETATION PATTERNS SHOULD BE RESTORED.

SAFETY

- THE DESIGN AND CONSTRUCTION OF THE WORKS SHALL COMPLY WITH ALL QUEENSLAND LEGISLATION.

DO NOT SCALE. CONFIRM ALL DIMENSIONS ON SITE. Copyright

ISSUE	AMENDMENT	DATE
A	ISSUED FOR COMMENT	15.12.17
B	ISSUED FOR COUNCIL APPROVAL	18.12.17

LEGEND

- W EXISTING WATER RETICULATION
- PROPOSED WATER SERVICE
- SWD EXISTING STORMWATER DRAINAGE
- SWD PROPOSED STORMWATER DRAINAGE
- S EXISTING SEWERAGE
- S PROPOSED SEWERAGE
- T EXISTING TELECOMMUNICATIONS
- KERB LINE
- E EXISTING UNDERGROUND ELECTRICAL
- X WATER SERVICE POINT OF ENTRY
- RM EXISTING RISING MAIN
- EXISTING ELECTRICAL PILLAR
- EXISTING FOOTPATH
- FUTURE FOOTPATH
- EXISTING CROSSOVER

SYMBOLS

- SLUICE VALVE
- SCOUR BRANCH
- DEAD END
- TEST POINT / CHLORINATION POINT
- REDUCER
- PROPOSED FIRE HYDRANT
- EXISTING FIRE HYDRANT
- EXISTING WATER METER

REAL PROPERTY DESCRIPTION
LOT 334 ON SP 193431

PROJECT
84 CHRISTENSEN ROAD
SOUTH, STAPYLTON

CLIENT
SPACEFRAME BUILDINGS
PTY LTD

TITLE
WATER RETICULATION
LAYOUT PLAN
AND DETAILS



HCE Engineers

Hydraulic • Civil • Environmental

P.O Box 7214, Phone: (07) 3829 1399
Redland Bay, mail@hce-engineers.com.au
QLD, 4165 6 Marine Street, Redland Bay

Designed MN	Drawn MN	Date 13.12.17
Approved	Scale AS SHOWN	Rev.
Drawing No. 8046-W01		B

SCALE 1:250 (A1) SCALE 1:2500 (A1)